



## Pro Core® 5 mm

# Technical specifications

Series	Wear layer (mm)	Thickness (mm)	Dimensions (mm)	# per box	m <sup>2</sup> per box	± kg per box		
1200	0,55	5	1220 x 183	12	2,68	22		
1500+	0,55	5	1520 x 183	10	2,78	23	•	
Tiles	0,55	5	610 x 472	10	2,88	24		

### LEVEL OF USE

Class 23 / 33 (EN ISO 10874)

### RESISTANCE TO STAINING

5 (no visible change) (EN 438-2)

### FIRE CLASSIFICATION

Bfl - S1 (EN 13501)

### GEOMETRICAL CHARACTERISTICS

Conform (EN 17539)

### LOCKING STRENGTH

LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

### SLIP RESISTANCE

DS - R10 (EN 13893 - DIN 51130)

### WEAR RESISTANCE

Pass 5000 cycles (ISO 24338)

### DIMENSIONAL STABILITY

Pass ≤ 0.25% (EN ISO 23999)

### UNDERFLOOR HEATING

Suitable (see: Underfloor Heating Guidelines)

### CASTOR CHAIR RESISTANCE

Pass 25 000 cycles (ISO 4918)

### COLOUR FASTNESS TO LIGHT

> grade 6 (EN ISO 105-B-02)

### ELECTROSTATIC PERFORMANCE

≤ 2 kV (EN 1815)

### EFFECT OF FURNITURE LEG

No visible change (EN 16581)

### IMPACT SOUND REDUCTION

$\Delta L_w = 17$  dB (ISO 10140-3 / EN 717-2)

### THERMAL RESISTANCE

0,0318 m<sup>2</sup>-K/W (EN 12667)

### RESIDUAL INDENTATION

≤ 0.10 mm (EN ISO 24343-1)

### FORMALDEHYDE EMISSION CLASS

E1 (EN 717-1)

## Legenda



Has bevels on the long & short sides




Has black bevels on the long sides



Lifetime warranty residential



10 year warranty commercial

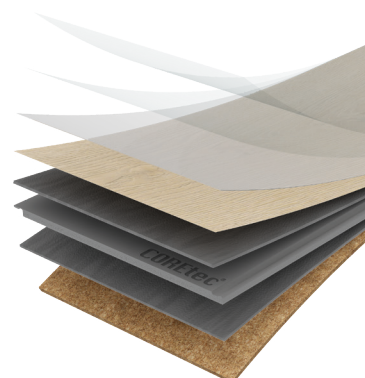

**Warranty (years)** The warranty covers manufacturing defects and premature wear in the event of normal use.