

XL-END

COREtec®



FLOORS

EN

Version 25/10/2023

Sound Core® 15 mm

Technical specifications

Series	Wear layer (mm)	Thickness (mm)	Dimensions (mm)	# per box	m ² per box	± kg per box		
XL-END	0,80	15	2100 x 228	3	1,44	22	•	•

LEVEL OF USE

Class 23 / 34 (EN ISO 10874)

RESISTANCE TO STAINING

5 (no visible change) (EN 438-2)

FIRE CLASSIFICATION

Bfl - S1 (EN 13501)

GEOMETRICAL CHARACTERISTICS

Conform (EN 17539)

LOCKING STRENGTH

LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

SLIP RESISTANCE

DS - R10 (EN 13893 - DIN 51130)

WEAR RESISTANCE

Pass 7000 cycles (ISO 24338)

DIMENSIONAL STABILITY

Pass ≤ 0.25% (EN ISO 23999)

UNDERFLOOR HEATING

Suitable (see: Underfloor Heating Guidelines)

CASTOR CHAIR RESISTANCE

Pass 25 000 cycles (ISO 4918)

COLOUR FASTNESS TO LIGHT

> grade 6 (EN ISO 105-B-02)

ELECTROSTATIC PERFORMANCE

≤ 5 kV (EN 1815)

EFFECT OF FURNITURE LEG

No visible change (EN 16581)

IMPACT SOUND REDUCTION

$\Delta L_w = 20$ dB (ISO 10140-3 / EN 717-2)

THERMAL RESISTANCE

0.1099 m²-K/W (EN 12667)

RESIDUAL INDENTATION

≤ 0.10 mm (EN ISO 24343-1)

FORMALDEHYDE EMISSION CLASS

E1 (EN 717-1)

Legenda



Has bevels on the long sides





The embossing follows the structure of the wood for a real-life touch



Lifetime warranty residential

10 year warranty commercial

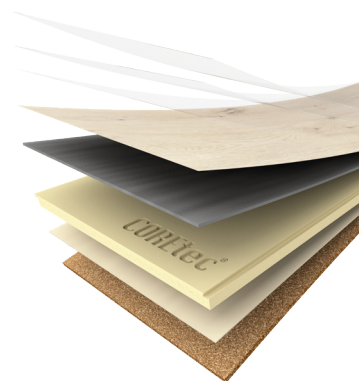

Warranty (years) The warranty covers manufacturing defects and premature wear in the event of normal use.