

EN

AUTHENTICS

Collection



Coretec®

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritize aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.



Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® Cleaning Kit.



100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a limited lifetime residential warranty.

Time saving solution

Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



SOUND CORE® - 8 mm

Silent & strong, down to the core

At COREtec®, we're proud to offer the most complete collection of 100% waterproof floors, so you can express what makes you, you.


0.55 mm
HIGH
PERFORMANCE
WEAR LAYERS

DECOR FILM
indistinguishable
from the real thing

COMFORT
warm & quiet
underfoot

SOUND CORE®
core with excellent
sound reduction

SUSTAINABLE
attached cork
underlayment

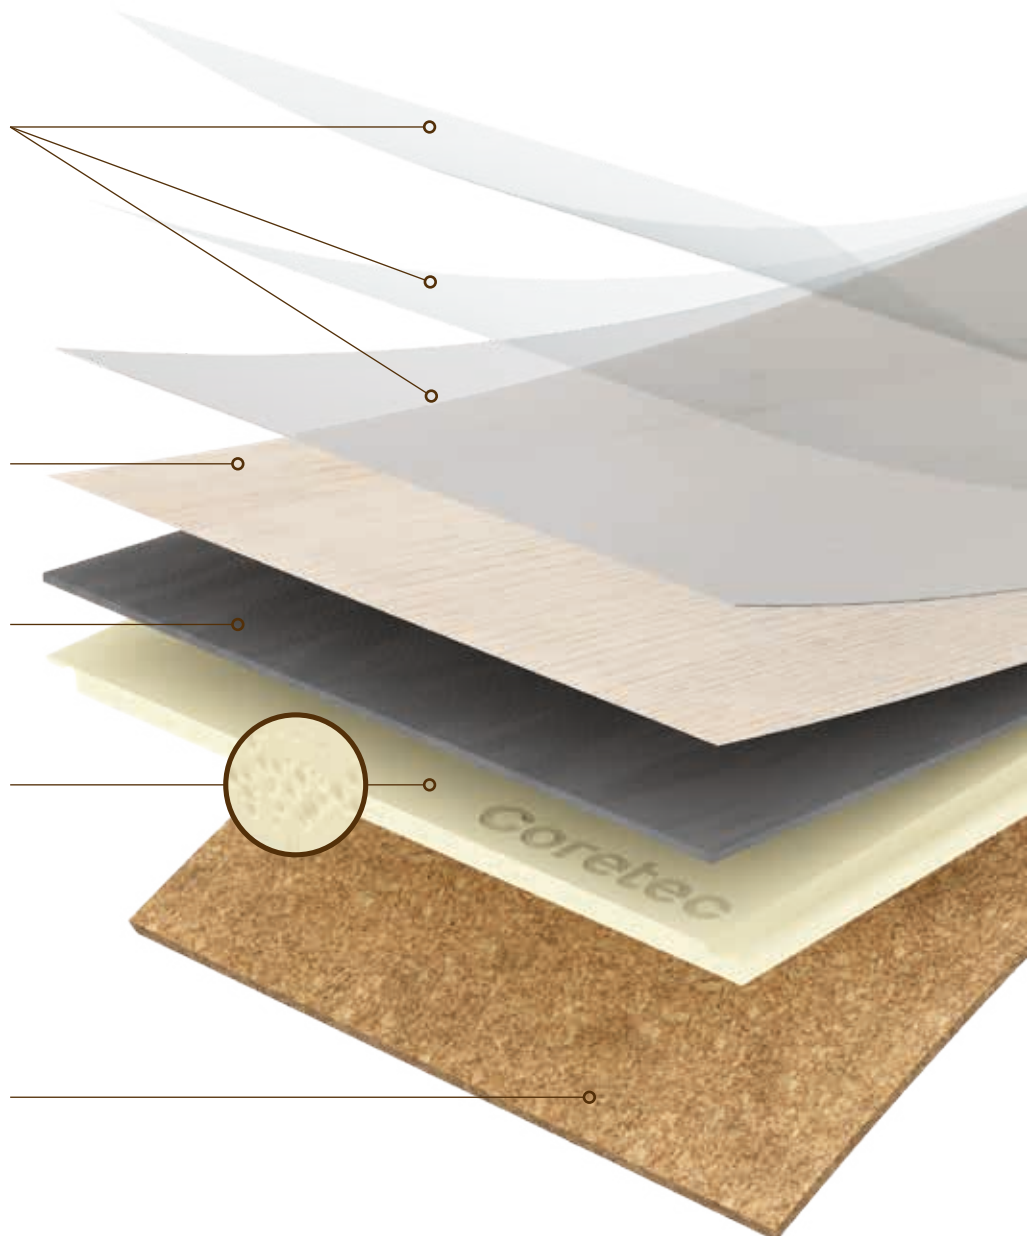



100% waterproof



Extremely stable



No acclimatisation necessary



Easy to install



Installation on any surface



Reduces noise



Wear resistant




Pet proof



Electrostatic performance



Ideal for underfloor heating & cooling

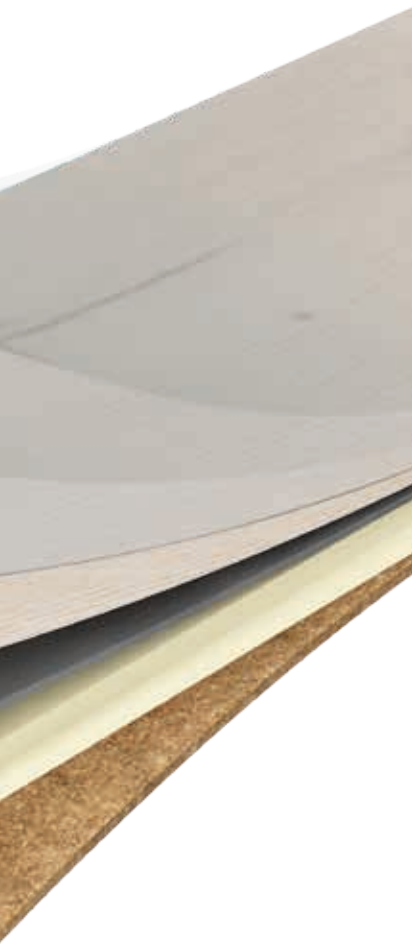

Authentic just like nature

A collection that combines exceptional natural appearance with unrivalled three-dimensional texture, that's Authentics. Lifelike wood and stone designs for rustic, characterful interiors.

Coretec®

AUTHENTICS

Collection





	1800 series		1500 series		1200 series	
	8 mm		8 mm		8 mm	
	0,55 mm		0,55 mm		0,55 mm	
	6 pcs 2,50 m ² ± 20 kg	8 pcs 2,65 m ² ± 23 kg	10 pcs 2,75 m ² ± 23 kg	12 pcs 2,65 m ² ± 23 kg		



Has pressed bevels on the long sides



Has bevels on the long sides

AUTHENTICS




Collection



Herringbone series

8 mm
0,55 mm
32 pcs 2,32 m ² ± 19 kg

Tile series

8 mm	
0,55 mm	
6 pcs 2,59 m ² ± 23 kg	



Has bevels on the long & short sides



The embossing follows the structure of the wood for a real-life touch

Pick your colour



p. 27

QUÉBEC 50 LVR 134




p. 31

YUKON 50 LVR 4354




p. 13

EMERALD 50 LVRE 110



p. 34
HB p. 42

NIMBUS 50 LVRE 140




p. 35
HB p. 43

ALTO 50 LVRE 141



p. 15

MORAINÉ 50 LVRE 113




p. 14

ONTARIO 50 LVRE 111




p. 26

EDMONTON 50 LVR 133




p. 29

KINGSTON 50 LVR 136



p. 30
HB p. 45

RICHMOND 50 LVR 4357




p. 37

ALBERTA 50 LVRE 4851




p. 19

LAWRENCE 50 LVRE 5087




p. 25

CALGARY 50 LVR 132



p. 33
HB p. 41

REGINA 50 LVRE 139



p. 18

WHISTLER 50 LVRE 4985




p. 32

HALIFAX 50 LVRE 138

AUTHENTICS

Collection



p. 17

CHAMPLAIN 50 LVRE 115




p. 38

SYDNEY 50 LVRE 4882




p. 23

MANITOBA 50 LVRE 123




p. 28

HAMILTON 50 LVR 135




p. 39

BRETON 50 LVRE 4887



p. 21

NUELTIN 50 LVRE 122




p. 47

CYCLONE 50 LVTE 150



p. 49

CUMULUS 50 LVTE 153



p. 48

CLOUD 50 LVTE 151



p. 51


CLEMENT 50 LVTE 154





1800 series

1830 × 181 × 8 mm
1830 × 228 × 8 mm



Emerald

50 LVRE 110
1830 × 181 × 8 mm






PLINTH 70 MD6 111



Ontario

50 LVRE 111
1830 × 181 × 8 mm

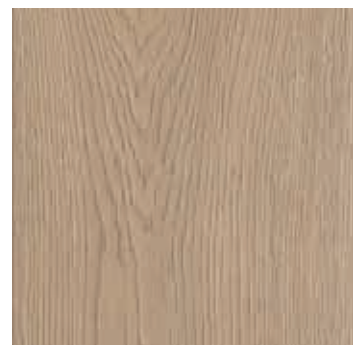



Moraine

50 LVRE 113
1830 × 181 × 8 mm







Champlain

50 LVRE 115
1830 × 181 × 8 mm





PLINTH 70 MD6 4985




Whistler

50 LVRE 4985
1830 × 228 × 8 mm



MULTICOLOUR EFFECT





MULTICOLOUR EFFECT

Lawrence

50 LVRE 5087
1830 × 228 × 8 mm








1500 series

1520 × 181 × 8 mm



Nueltin

50 LVRE 122

1830 × 181 × 8 mm







Manitoba

50 LVRE 123

1520 × 181 × 8 mm







1200 series

1220 × 181 × 8 mm
1220 × 182 × 8 mm



Calgary

50 LVR 132
1220 × 181 × 8 mm






Edmonton

50 LVR 133

1220 × 181 × 8 mm

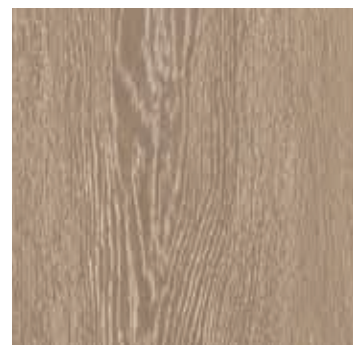



Quebec


50 LVR 134
1220 × 181 × 8 mm






Hamilton

50 LVR 135
1220 × 181 × 8 mm

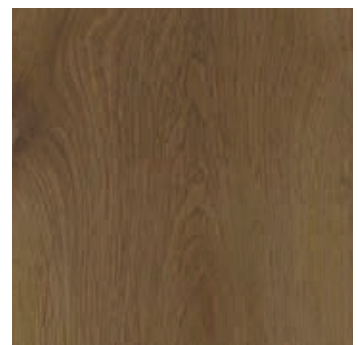



PLINTH 70 MD6 136



Kingston

50 LVR 136
1220 × 181 × 8 mm






Richmond

50 LVR 4357

1220 × 181 × 8 mm





Yukon


50 LVR 4354
1220 × 181 × 8 mm





Halifax

50 LVRE 138
1220 × 181 × 8 mm

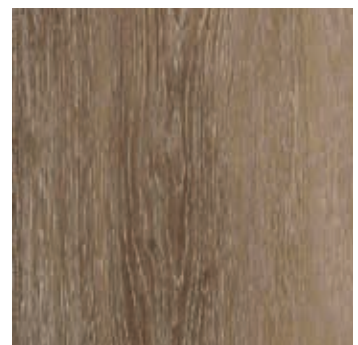



Regina

50 LVRE 139
1220 × 181 × 8 mm







Nimbus

50 LVRE 140

1220 × 181 × 8 mm

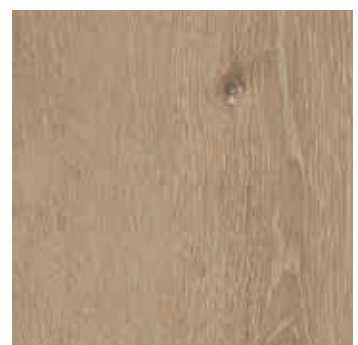



Alto

50 LVRE 141

1220 × 181 × 8 mm







Alberta

50 LVRE 4851
1220 × 182 × 8 mm



MULTICOLOUR EFFECT




Sydney

50 LVRE 4882
1220 × 182 × 8 mm




MULTICOLOUR EFFECT

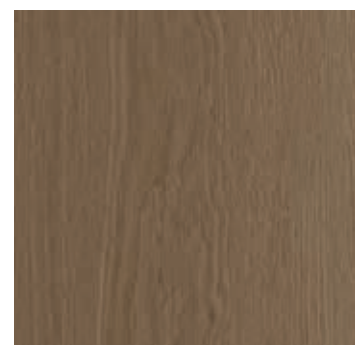



PLINTH 70 MD6 4887



MULTICOLOUR EFFECT

Breton

50 LVRE 4887
1220 × 182 × 8 mm








Herringbone series

660 × 110 × 8 mm



Regina

50 LVREH 139


660 × 110 × 8 mm






Nimbus

50 LVREH 140
660 × 110 × 8 mm






Alto

50 LVREH 141
660 × 110 × 8 mm







Richmond

50 LVREH 4357
660 × 110 × 8 mm







Tile series

915 × 471 × 8 mm



Cyclone

50 LVTE 150
915 × 471 × 8 mm





Cloud

50 LVTE 151
915 × 471 × 8 mm






Cumulus

50 LVT 153

915 × 471 × 8 mm







Clement

50 LVTE 154
915 × 471 × 8 mm




Accessories

Paintable skirtings



CASTLE

13.8 cm 1.8 cm 2 m
70 PSK2000-1



HIGH

10.2 cm 1.3 cm 2.3 m
70 PSK2300-3



COVER


← Max. 1,3 cm

10 cm 2.20 cm 2 m
70 PSK2000-2



MIDDLE

6.6 cm 1.3 cm 2.3 m
70 PSK2300-2



LOW

4 cm 1 cm 2.3 m
70 PSK2300-1




Discover all accessories

Matching design accessories



... = Matching design reference



MODERN

5.8 cm 1.3 cm 2.4 m
70 MD6

Aluminium profiles




2001
Matte
black



2002
Brushed
aluminium




2003
Champagne
bronze




T-PROFILE

8-15 mm 3.4 cm 2 m
70 ATP SC



REDUCER

8-15 mm 4.4 cm 2 m
70 ARP SC

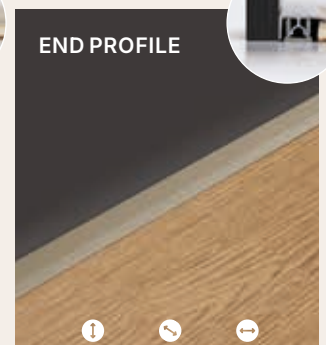

END PROFILE



8-15 mm 2.6 cm 2 m
70 AEP SC

Installation

Easy installation

Coretec® floors have the easiest install on the market.

Watch our installation video on our website. www.coretecfloors.com

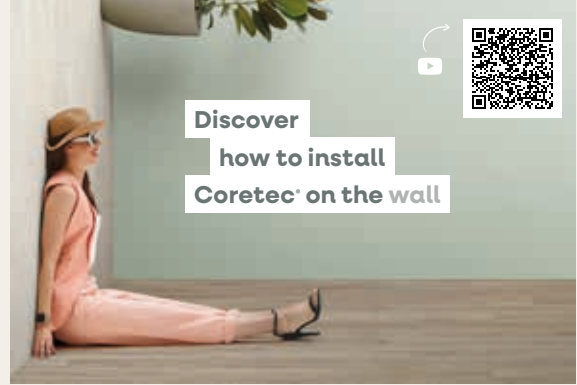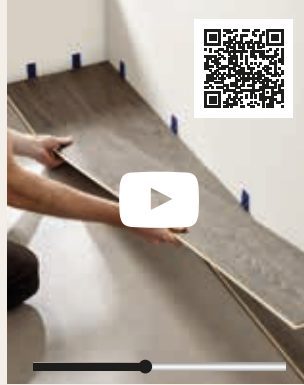

Herringbone Series variations

Mix & match your own style with our herringbone planks.

Please consult our installation guide for more information about specific requirements, such as expansion gaps and material needs.




SINGLE




DOUBLE




TRIPLE




SQUARE



BRICK



CORNER



MOSAIC

Maintenance

The Coretec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover







80 CCS 3400





ALTO 50 LVREH 141

Series	Name	SKU Number	Length (mm)	Width (mm)	Thickness (mm)					Pieces / box	M ² / box	± Weight box (kg)
1800	Emerald	50 LVRE 110	1830	181	8		•	•	•	8	2,65	23
	Ontario	50 LVRE 111	1830	181	8		•	•	•	8	2,65	23
	Moraine	50 LVRE 113	1830	181	8		•	•	•	8	2,65	23
	Champlain	50 LVRE 115	1830	181	8		•	•	•	8	2,65	23
	Whistler	50 LVRE 4985	1830	228	8			•	•	6	2,50	20
	Lawrence	50 LVRE 5087	1830	228	8			•	•	6	2,50	20
1500	Nueltin	50 LVRE 122	1520	181	8		•	•	•	10	2,75	23
	Manitoba	50 LVRE 123	1520	181	8		•	•	•	10	2,75	23
1200	Calgary	50 LVR 132	1220	181	8			•	•	12	2,65	23
	Edmonton	50 LVR 133	1220	181	8			•	•	12	2,65	23
	Quebec	50 LVR 134	1220	181	8			•	•	12	2,65	23
	Hamilton	50 LVR 135	1220	181	8			•	•	12	2,65	23
	Kingston	50 LVR 136	1220	181	8			•	•	12	2,65	23
	Richmond	50 LVR 4357	1220	181	8			•	•	12	2,65	23
	Yukon	50 LVR 4354	1220	181	8			•	•	12	2,65	23
	Halifax	50 LVRE 138	1220	181	8		•	•	•	12	2,65	23
	Regina	50 LVRE 139	1220	181	8		•	•	•	12	2,65	23
	Nimbus	50 LVRE 140	1220	181	8		•	•	•	12	2,65	23
	Alto	50 LVRE 141	1220	181	8		•	•	•	12	2,65	23
	Alberta	50 LVRE 4851	1220	182	8	•		•	•	12	2,65	23
	Sydney	50 LVRE 4882	1220	182	8	•		•	•	12	2,65	23
	Breton	50 LVRE 4887	1220	182	8	•		•	•	12	2,65	23
Herringbone	Regina	50 LVREH 139	660	110	8		•	•	•	A:16 - B:16	2,32	19
	Nimbus	50 LVREH 140	660	110	8		•	•	•	A:16 - B:16	2,32	19
	Alto	50 LVREH 141	660	110	8		•	•	•	A:16 - B:16	2,32	19
	Richmond	50 LVREH 4357	660	110	8		•	•	•	A:16 - B:16	2,32	19
Tile	Cyclone	50 LVTE 150	915	471	8		•			6	2,59	23
	Cloud	50 LVTE 151	915	471	8		•			6	2,59	23
	Cumulus	50 LVTE 153	915	471	8		•			6	2,59	23
	Clement	50 LVTE 154	915	471	8		•			6	2,59	23

Technical specifications (IT - ES - PT)

LEVEL OF USE

Classe d'uso / Clasificación de uso /
Classe de utilização
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Fantasie geometriche / Características
geométricas / Características geométricas
Conform (EN 17539)

WEAR RESISTANCE

Resistenza all'usura / Resistencia al
desgaste / Resistência ao desgaste
Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Resistenza alle sedie con ruote / Resistencia
a sillas con ruedas / Resistência a cadeira
de rodas
Pass 25000 cycles (ISO 24338)

EFFECT OF FURNITURE LEG

Effeto furniture leg / Efecto de la pata
de un mueble / Efeito da perna do móvel
No visible change (EN 16581)

RESIDUAL INDENTATION

Indentazione residua certificata /
Huella residual / Recuo Residual
 ≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Resistenza alle macchie / Resistencia al
manchado / Resistência a manchas
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Chiusura perfetta con sistema a click /
Resistencia a la tracción / Força de encaixe
 $LS \geq 2.0$ / $SS \geq 3.5$ (EN 24334)

DIMENSIONAL STABILITY

Stabilità dimensionale / Estabilidad
dimensional / Estabilidade dimensional
Pass $\leq 0.25\%$ (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Resistenza alla luce / Solidez del color a luz
artificial / Resistência da cor à luz
> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION

Isolamento acustico / Aislamiento acústico /
Isolamento acústico
 $\Delta L_w = 20$ dB (ISO 10140-3 / EN 717-2)
 $\Delta L_{LIN} = 10$ dB (ISO 10140-3 / EN 717-1)

FORMALDEHYDE EMISSION CLASS

Classe Formaldeide / Emisión formaldeído /
Classificação formaldeído
E1 (EN 717-1)

FIRE CLASSIFICATION

Classe di resistenza al fuoco / Resistencia al
fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Coefficiente dinamico di attrito / Coeficiente de
fricción / Coeficiente de atrito
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Riscaldamento a pavimento / Calefacción por
suelo radiante / Aquecimento por piso radiante
Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE

Performance elettrostatica / Rendimiento
antiestático / Acumulação de cargas eletrostáticas
 ≤ 5 kV (EN 1815)

THERMAL RESISTANCE

Resistenza al calore / Aislamiento térmico /
Isolamento térmico
 0.066 m²-K/W (EN 12667)

Technical specifications (FI - SV - NO - DK)

LEVEL OF USE

Käyttöluokka / Klassificering
användningsområde / Bruksklasse /
Anvendelsesgrad
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Geometriset ominaisuudet / Geometrisk
karakteristik / Geometriske kjennetegn /
Geometriske egenskaber
Conform (EN 17539)

WEAR RESISTANCE

Kulutuksenkesto / Slitstyrka / Slitstyrke /
Slidstyrke
Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Pyörällisen toimistotuolin kesto / Tålighet
mot rullhjul / Motstandsdyktighet /
Modstandsdygtighed over for hjulstol
Pass 25000 cycles (ISO 24338)

EFFECT OF FURNITURE LEG

Huonekalun jalkojen kesto / Verkan från
möbelben / Effekt møbelbein / Virkning af
møbelben
No visible change (EN 16581)

RESIDUAL INDENTATION

Jännöspainuma / Beständighet mot
intrycksmärken / Motstandsdyktighet mot
tryckmerker / Resterende indtryk
 ≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Tahraantumisenkesto / Fläckbeständighet
/Motstandsdyktighet mot flekker /
Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Lukituksen vahvuus / Låsningsstyrka /
Låsestabilitet / Låsningsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Mittavakaus / Dimensionsstabilitet vid
värmepåverkan / Formstabilitet / Dimensionel
stabilitet
Pass $\leq 0.25\%$ (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Valonkesto / Färghärdighet / Lysfasthet /
Låsningsstyrke
> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION

Askeläänen parannusarvo / Ljudisolering /Akustisk
isolasjon (lydisolering) / Reduktion af stødlyd
 $\Delta L_w = 20$ dB (ISO 10140-3 / EN 717-2)
 $\Delta L_{LIN} = 10$ dB (ISO 10140-3 / EN 717-1)

FORMALDEHYDE EMISSION CLASS

Formaldehydiluokka / Formaldehydemission
/Formaldehyd emisjonsgruppe /
Formaldehydemissionsklasse
E1 (EN 717-1)

FIRE CLASSIFICATION

Paloluokka / Flamsäkerhet / Brannklasse /
Brandklassificering
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Kitka / Halksäkerhet / Sklimotstand /
Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Lattialämmitys / Värmegolv / Gulvvarme /
Gulvvarme
Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE

Sähköstaattinen varautuminen / Prestanda statisk
elektricitet / Elektrostatisk ytelse (antistatisk) /
Elektrostatisk ydeevne
 ≤ 5 kV (EN 1815)

THERMAL RESISTANCE

Lämmönvastus / Värmemotstånd /
Varmebestandighet / Termisk
modstandsdygtighed
 0.066 m²-K/W (EN 12667)

Technical specifications (SK - PL - RU - HU - CZ - LT)

LEVEL OF USE

Úroveň použitia / Klasa ścieralności / Класс использования / Európai besorolás / Úroveň použití / Atsparumo klasė

Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Geometrické parametre / Charakterystyka Geometryczna / геометрические характеристики / Geometriai jellemző / Rozměry / Geometrinės savybės

Conform (EN 17539)

WEAR RESISTANCE

Odolnosť voči opotrebeniu / Wytrzymałość na zużycie / износостойкость / Korásállóság / Odolnost proti opotřebení / Atsparumas dilimui

Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Odolnosť voči kolieskam na stoličke / Odporność na krzesła obrotowe z kółkami / Стойкость к креслам с роликами / Görgös szék teszt / Odolnost vůči kolečkovým židlým / Atsparumas kėdžių ratukams

Pass 25000 cycles (ISO 24338)

EFFECT OF FURNITURE LEG

Efekt z nôh nábytku / Wpływ nogi meblowej / воздействие мебельных ножек / Bútorlábhatás / Vliv nábytkové nožky / Baldu poveikis

No visible change (EN 16581)

RESIDUAL INDENTATION

Trvalá deformácia / Pozostałe wgniecenie / остаточные вмятины / Megmaradó benyomódás / Trvalá deformace / Likęs įdubimas

≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Odolnosť voči napúšťaniu farbou / Odporność na barwienie / устойчивость к пятнообразованию / Foltállóság / Odolnost proti vzniku skvrn / Atsparumas dėmėms

5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Pevnosť pripojenia / Wytrzymałość blokowania / прочность крепления / Záróerő / Pevnostzajištění / Blokavimo jėga

LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Rozmerová stabilita / Stabilność wymiarowa / Стабильность размеров / Méretstabilitás / Rozměrová stabilita / Matmenų stabilumas

Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Stálosť farby na svetle / Odporność koloru na światło / устойчивость окраски к свету / Színtartósság / Stálobarevnost na světle / Spalvų atsparumas šviesai

> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION

Akustická izolácia / Izolacja akustyczna / Звукоизоляция / Hangszigetelés / Akustická izolace / Garso slopinimas

$\Delta L_w = 20$ dB (ISO 10140-3 / EN 717-2)

$\Delta L_{LIN} = 10$ dB (ISO 10140-3 / EN 717-1)

FORMALDEHYDE EMISSION CLASS

Formaldehidová skupina / Emisja formaldehydu / Класс эмиссии формальдегида / Formaldehyd csoport / Formaldehydová skupina / Formaldehyde group

E1 (EN 717-1)

FIRE CLASSIFICATION

Klasifikácia voči požiaru / klasyfikacja ogniowa / класс огнестойкости / Tűzállósági osztály / Požární klasifikace / Degumo klasifikacija

Bfl - S1 (EN 13501)

SLIP RESISTANCE

Protišmykovosť / Śliskość / Стойкость к скольжению / Csúszásmentes / Protiskluznost / Slidumo klasė

DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Podlahové vykurovanie / Ogrzewanie podłogowe / Полы с подогревом / Padlófűtésre / Podlahové vykurování / Šildomos grindys

Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE

Elektrostatické prevedenie / Akumulacja ładunków elektrostatycznych / Электростатичность / Elektromos feltöltődés / Elektrostatische provedení / Antistatishkumas

≤ 5 kV (EN 1815)

THERMAL RESISTANCE

Tepelná odolnosť / Odporność cieplna / термостойкость / Hőállóság / Teplotní odolnost / Terminis atsparumas

0.066 m²-K/W (EN 12667)



**It's in our core
to adore nature**





Our commitments



Choose me once, love me for life

We believe in a world where things last! For a lifetime, and longer. That's good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.



Breathe healthy air

The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.



Sustainable cork underlay

Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO₂ emissions.



We can prove it

Don't take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.



Second Life

So you're changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.



Do your bit for forest conservation

There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.

Coretec®



Coretec® floors are that good, somebody else can re-enjoy it.

Learn how your Coretec® floor gets a second life.





Coretec®, the natural choice



Lifetime
warranty
residential



10 years
warranty
commercial



- Warranty (Years)** The warranty covers manufacturing defects and premature wear in the event of normal use.
- Garanzia (anni)** La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
- Garantía (años)** La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
- Garantia (anos)** A garantia cobre defeitos industriais e uso prematuro usado normal.
- Takuu (vuosi)** Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
- Garanti (år)** Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
- Garanti (år)** Garantien gäller tillverkningsfel och för tidig utslitning vid normalt användande.
- Garanti (år)** Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
- Záruka (rok)** Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
- Termin gwarancji (rok)** Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
- Гарантия (лет)** Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
- A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.**
- Záruka (rok)** Záruka se vzťahuje na vady z výroby a predčasné opotrebení v prípade běžného používání.
- Garantija (Metai)** Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com



US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF  INDUSTRIES