

EN

SUR-PLUS

Floors with attitude



Coretec®

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.



Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® Cleaning Kit.



100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a limited lifetime residential warranty.

Time saving solution

Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



Pro Core® 5 mm

The original 100% waterproof floor, with extra dent & impact resistance

0.55 mm
HIGH
PERFORMANCE
WEAR LAYERS

DECOR FILM
indistinguishable
from the real thing

COMFORT
warm & quiet
underfoot

PRO CORE®
core with extra dent
& impact resistance

BALANCING LAYER
extra stability

SUSTAINABLE
attached cork
underlayment



100% waterproof



Extremely stable



No acclimatisation necessary



Easy to install



Installation on any surface



Reduces noise



Wear resistant



Pet proof



Electrostatic performance



Ideal for underfloor heating & cooling

Floors with attitude



SurPlus brings you eccentric and **bold floors for demanding locations** such as shops, offices, and public buildings. Built to last, for high traffic residential and commercial use.

Dare to be different.

SUR-PLUS

Matching your projects

PLANKS

1220 × 183 mm

 5,00 mm  0,55 mm  12 pcs
2,68 m²
± 22 kg



PLANKS

1220 × 127 mm

 5,00 mm  0,55 mm  14 pcs
2,17 m²
± 18 kg





1200 2V Black series

Navytec 47


50 RLVE 4047
1220 × 127 × 5 mm



1200 MB series

Navytec 83

50 RLVE 4083
1220 × 127 × 5 mm

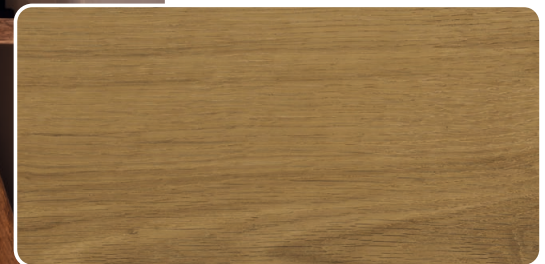

1200 MB series

Noble Oak 55

50 RLV 3955
1220 × 183 × 5 mm



Plinth 70 MS10 3955





↪ Noble Oak 14 50 RLV 3914



1200 MB series

Graphic 97

50 RLV 3897
1220 × 183 × 5 mm



1200 MB series

Graphic 93

50 RLV 3893
1220 × 183 × 5 mm




Plinth 70 MS10 3673



1200 MB series

Elegance Oak 73

50 RLV 3673
1220 × 183 × 5 mm

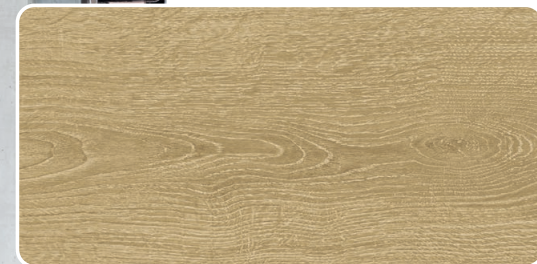

1200 MB series

Elegance Oak 76

50 RLV 3676
1220 × 183 × 5 mm



1200 MB series

Elegance Oak 83

50 RLV 3683
1220 × 183 × 5 mm



Plinth 70 MS10 3683



Graphic 93 50 RLV 3893



Plinth 70 MS10 3585

1200 MB series

Royal Walnut 85

50 RLV 3585
1220 × 183 × 5 mm



1200 MB series

Industry Oak 94

50 RLV 3794
1220 × 183 × 5 mm



1200 MB series

Industry Oak 74

50 RLV 3774
1220 × 183 × 5 mm



Plinth 70 MS10 3774



Plinth 70 MS10 3914



1200 MB series

Noble Oak 14

50 RLV 3914

1220 × 183 × 5 mm

Accessories

Paintable skirtings




.... = Matching design reference

Matching design accessories







.... = passendes Design Ref.Nr.

Aluminium profiles



Discover all accessories




Installation

Easy installation

Coretec® floors have the easiest install on the market.

Watch our installation video on our website www.coretecfloors.com, or by scanning the QR code.

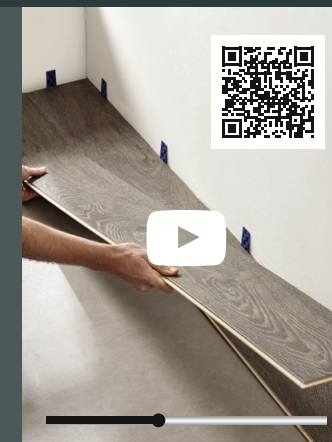

Maintenance

The Coretec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



Technical specifications (IT - ES - PT)

LEVEL OF USE

Classe d'uso / Clasificación de uso /
Classe de utilização
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Fantasie geometriche / Características
geométricas / Características geométricas
Conform (EN 17539)

WEAR RESISTANCE

Resistenza all'usura / Resistencia al
desgaste / Resistência ao desgaste
Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Resistenza alle sedie con ruote / Resistencia
a sillas con ruedas / Resistência a cadeira
de rodas
Pass 25000 cycles (ISO 24338)

EFFECT OF FURNITURE LEG

Effeto furniture leg / Efecto de la pata
de un mueble / Efeito da perna do móvel
No visible change (EN 16581)

RESIDUAL INDENTATION

Indentazione residua certificata /
Huella residual / Recuo Residual
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Resistenza alle macchie / Resistencia al
manchado / Resistência a manchas
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Chiusura perfetta con sistema a click /
Resistencia a la tracción / Força de encaixe
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Stabilità dimensionale / Estabilidad
dimensional / Estabilidade dimensional
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Resistenza alla luce / Solidez del color a luz
artificial / Resistência da cor à luz
> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION

Isolamento acustico / Aislamiento acústico /
Isolamento acústico
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS

Classe Formaldeide / Emisión formaldehído /
Classificação formaldeído
E1 (EN 717-1)

FIRE CLASSIFICATION

Classe di resistenza al fuoco / Resistencia al
fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Coefficiente dinamico di attrito / Coeficiente de
fricción / Coeficiente de atrito
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Riscaldamento a pavimento / Calefacción por
suelo radiante / Aquecimento por piso radiante
Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE

Performance elettrostatica / Rendimiento
antiestático / Acumulação de cargas eletrostáticas
≤ 2 kV (EN 1815)

THERMAL RESISTANCE

Resistenza al calore / Aislamiento térmico /
Isolamento térmico
0.0318 m²-K/W (EN 12667)

Technical specifications (FI - SV - NO - DK)

LEVEL OF USE

Käyttöluokka / Klassificering
användningsområde / Bruksklasse /
Anvendelsesgrad
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Geometriset ominaisuudet / Geometrisk
karakteristik / Geometriske kjennetegn /
Geometriske egenskaber
Conform (EN 17539)

WEAR RESISTANCE

Kulutuksenkesto / Slitstyrka / Slitestyrke /
Slidstyrke
Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Pyörällisen toimistotuolin kesto / Tålighet
mot rullhjul / Motstandsdyktighet /
Modstandsdygtighed over for hjulstol
Pass 25000 cycles (ISO 24338)

EFFECT OF FURNITURE LEG

Huonekalun jalkojen kesto / Verkan från
möbelben / Effekt møbelbein / Virkning af
møbelben
No visible change (EN 16581)

RESIDUAL INDENTATION

Jäännöspainuma / Beständighet mot
intrycksmärken / Motstandsdyktighet mot
trykkmerker / Resterende indtryk
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Tahraantumisenkesto / Fläckbeständighet
/Motstandsdyktighet mot flekker /
Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Lukituksen vahvuus / Låsningsstyrka /
Låsestabilitet / Låsningsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Mittavakaus / Dimensionsstabilitet vid
värmepåverkan / Formstabilitet / Dimensionel
stabilitet
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Valonkesto / Färghårdighet / Lysfasthet /
Låsningsstyrke
> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION

Askeläänen parannusarvo / Ljudisolering /Akustisk
isolasjon (lydisolering) / Reduktion af stødlyd
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS

Formaldehydiluokka / Formaldehydemission
/Formaldehyd emisjonsgruppe /
Formaldehydemissionsklasse
E1 (EN 717-1)

FIRE CLASSIFICATION

Paloluokka / Flamsäkerhet / Brannklasse /
Brandklassificering
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Kitka / Halksäkerhet / Sklimotstand /
Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Lattialämmitys / Värmegolv / Gulvvarme /
Gulvvarme
Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE

Sähköstaattinen varautuminen / Prestanda statisk
elektricitet / Elektrostatisk ytelse (antistatisk) /
Elektrostatisk ydeevne
≤ 5 kV (EN 1815)

THERMAL RESISTANCE

Lämmönvastus / Värmemotstånd /
Varmebestandighet / Termisk
modstandsdygtighed
0.066 m²-K/W (EN 12667)

Technical specifications (SK - PL - RU - HU - CZ - LT)

LEVEL OF USE

Úroveň použitia / Klasa ścieralności / Класс использования / Európai besorolás / Úroveň použití / Atsparumo klasė
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Geometrické parametre / Charakterystyka Geometryczna / геометрические характеристики / Geometriai jellemző / Rozměry / Geometrinės savybės
Conform (EN 17539)

WEAR RESISTANCE

Odolnosť voči opotrebeniu / Wytrzymałość na zużycie / износостойкость / Korásállóság / Odolnost proti opotřeбенí / Atsparumas dilimui
Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Odolnosť voči kolieskam na stoličke / Odporność na krzesła obrotowe z kółkami / Стойкость к креслам с роликами / Görgős székek teszt / Odolnost vůči kolečkovým židlým / Atsparumas kėdžių ratukams
Pass 25000 cycles (ISO 24338)

EFFECT OF FURNITURE LEG

Efekt z nôh nábytku / Wpływ nogi meblowej / воздействие мебельных ножек / Bútorlábhatás / Vliv nábytkové nožky / Baldu poveikis
No visible change (EN 16581)

RESIDUAL INDENTATION

Trvalá deformácia / Pozostałe wgniecenie / остаточные вмятины / Megmaradó benyomódás / Trvalá deformace / Likęs įdubimas
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Odolnosť voči napúšťaniu farbou / Odporność na barwienie / устойчивость к пятнообразованию / Foltállóság / Odolnost proti vzniku skvrn / Atsparumas dėmėms
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Pevnosť pripojenia / Wytrzymałość blokowania / прочность крепления / Záróerő / Pevnostzajištění / Blokavimo jėga
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Rozmerová stabilita / Stabilność wymiarowa / Стабильность размеров / Méretstabilitás / Rozměrová stabilita / Matmenų stabilumas
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Stálosť farby na svetle / Odporność koloru na światło / устойчивость окраски к свету / Színtartósság / Stalobarevnost na světle / Spalvų atsparumas šviesa
> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION

Akustická izolácia / Izolacja akustyczna / Звукоизоляция / Hangszigetelés / Akustická izolace / Garso slopinimas
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS

Formaldehidová skupina / Emisja formaldehydu / Класс эмиссии формальдегида / Formaldehyd csoport / Formaldehydová skupina / Formaldehyde group
E1 (EN 717-1)

FIRE CLASSIFICATION

Klasifikácia voči požiaru / klasyfikacja ogniowa / класс огнестойкости / Tűzállósági osztály / Požární klasifikace / Degumo klasifikacija
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Protišmykovosť / Śliskość / Стойкость к скольжению / Csúszásmentes / Protiskluznost / Slidumo klasė
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Podlahové vykurovanie / Ogrzewanie podłogowe / Полы с подогревом / Padlófűtésre / Podlahové vykurování / Šildomos grindys
Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE

Elektrostatické prevedenie / Akumulacja ładunków elektrostatycznych / Электростатичность / Elektromos feltöltődés / Elektrostatické provedení / Antistatiškumas
≤ 2 kV (EN 1815)

THERMAL RESISTANCE

Tepelná odolnosť / Odporność cieplna / термостойкость / Hőállóság / Teplotní odolnost / Terminis atsparumas
0.0318 m²-K/W (EN 12667)

	Name	SKU Number	Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M² / box	± Weight box (kg)
1200	Navytec 47	50 RLVE 4047	1220	127	5	●	●	14	2,17	18
	Navytec 83	50 RLVE 4083	1220	127	5	●	●	14	2,17	18
	Royal Walnut 85	50 RLV 3585	1220	183	5			12	2,68	22
	Elegance Oak 73	50 RLV 3673	1220	183	5			12	2,68	22
	Elegance Oak 76	50 RLV 3676	1220	183	5			12	2,68	22
	Elegance Oak 83	50 RLV 3683	1220	183	5			12	2,68	22
	Industry Oak 94	50 RLV 3794	1220	183	5			12	2,68	22
	Industry Oak 74	50 RLV 3774	1220	183	5			12	2,68	22
	Graphic 97	50 RLV 3897	1220	183	5			12	2,68	22
	Graphic 93	50 RLV 3893	1220	183	5			12	2,68	22
	Noble Oak 55	50 RLV 3955	1220	183	5			12	2,68	22
	Noble Oak 14	50 RLV 3914	1220	183	5			12	2,68	22





NOBLE OAK 55



GRAPHIC 93

It's in our **core** to adore nature

Our commitments



Choose me once, love me for life

We believe in a world where things last! For a lifetime, and longer. That's good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.



Breathe healthy air

The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.



Sustainable cork underlay

Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO₂ emissions.



We can prove it

Don't take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.



Second Life

So you're changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.



Do your bit for forest conservation

There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.




Coretec®



**Coretec® floors are
that good, somebody else
can re-enjoy it.**

Learn how your Coretec® floor gets a second life.

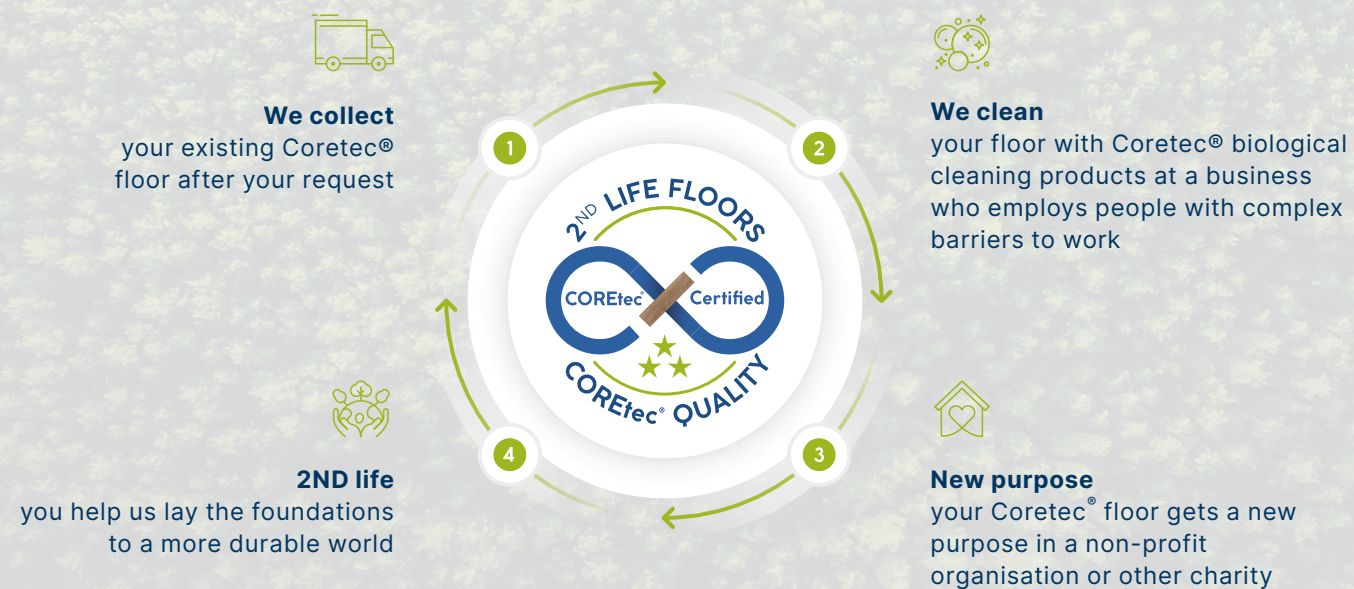

Coretec®, the natural choice



Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.
Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalisti käytöstä johtuvan pinnan puhkikulumisen.
Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
Garanti (år) Garantien gäller tillverkningsfel och för tidig utslitning vid normalt användande.
Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vzťahuje na vady z výroby a předčasné opotřebení v případě běžného používání.
Garantija (Metai) Garantija taikoma gamybos trūkumams ir per greitam nusidėvimui eksploatuojant normaliomis sąlygomis

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com



US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF  INDUSTRIES