

COREtec®

FLOORS

SUR-PLUS

Floors with attitude

EN

FI - SV - NO - DK

Why choose a COREtec[®] floor?



1 Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.



3 100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all COREtec[®] floors come with a limited lifetime residential warranty.

2 Easy to maintain

Our high performance wear layers with which all our floors are coated, will make sure your floor is easy to maintain. Had an accident? Just wipe it off with a rag and it's gone.

In addition, the wear layers makes your floor even more scratch resistant and ready for intensive use.



4 Time saving solution


COREtec[®] is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



PRO CORE® - 5 mm

The original 100% waterproof floor, with extra dent & impact resistance

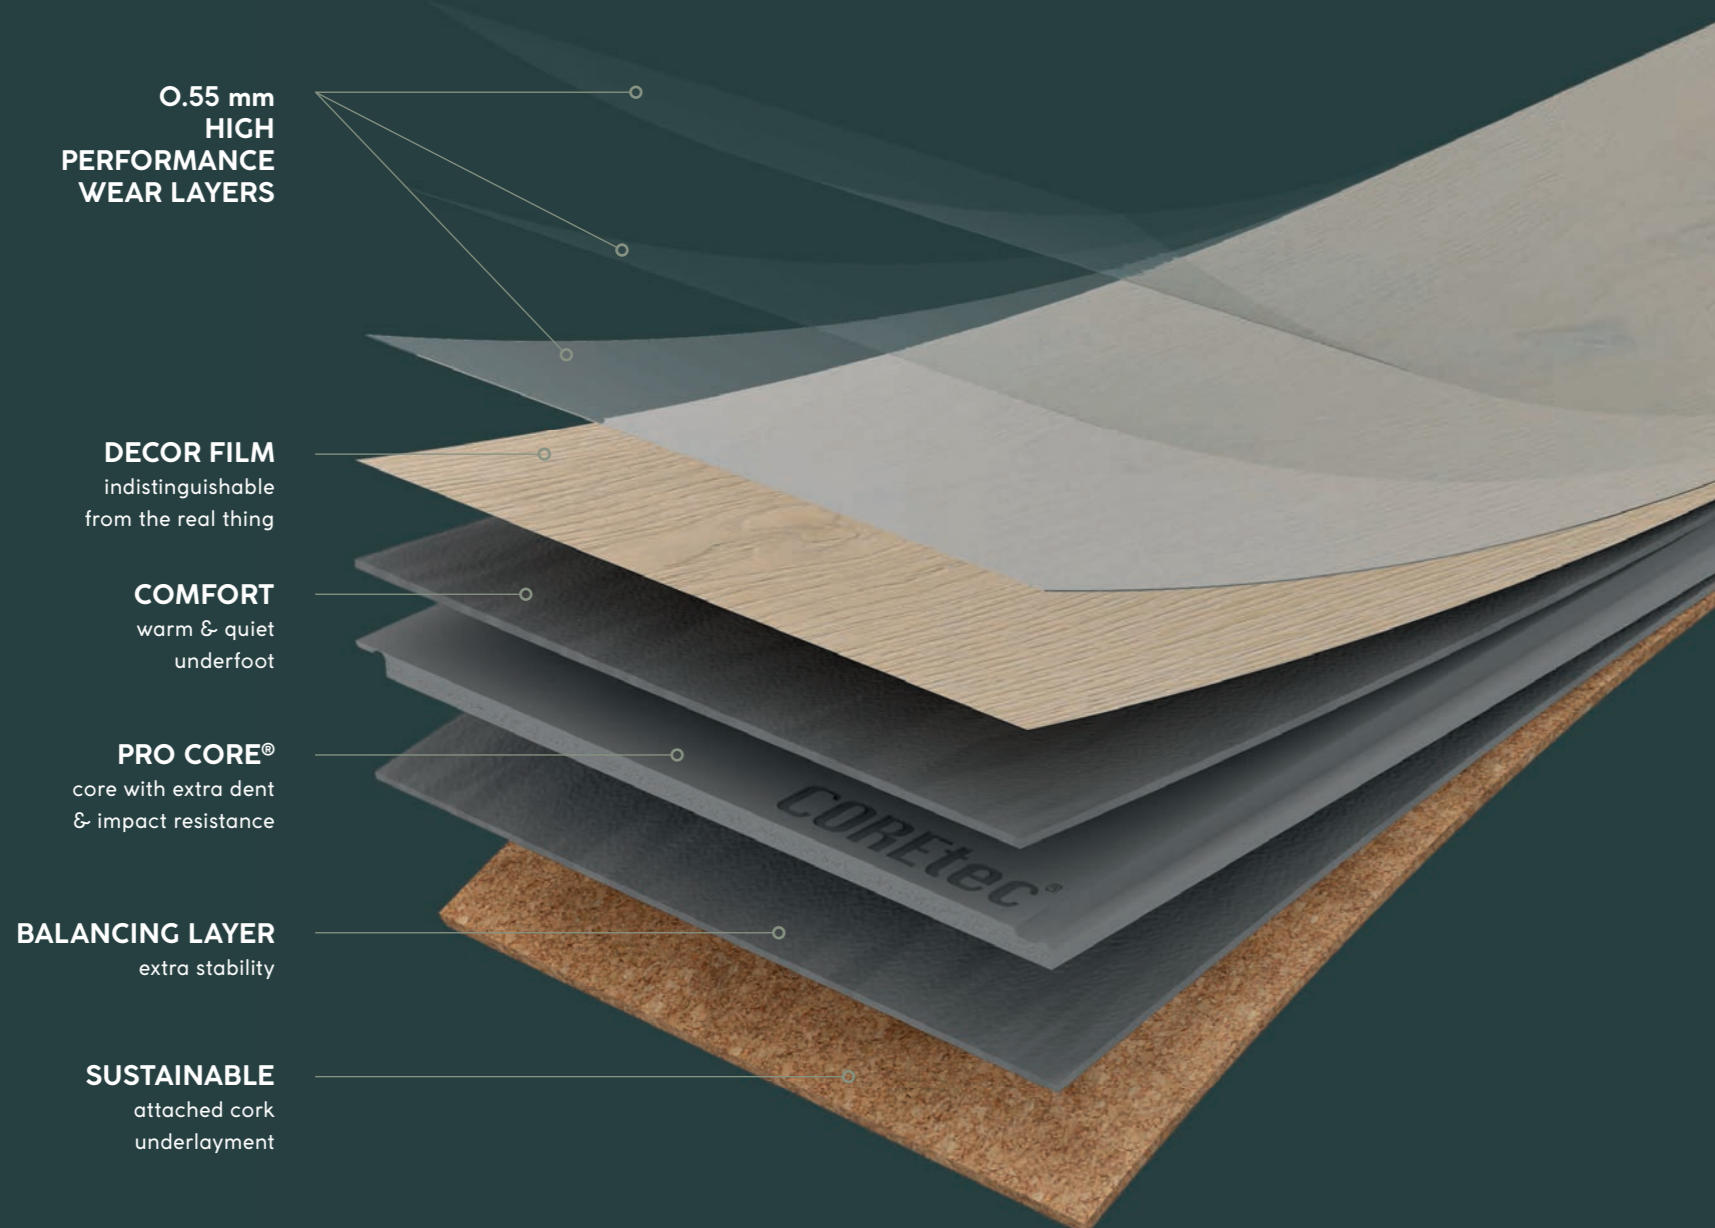

0.55 mm
HIGH
PERFORMANCE
WEAR LAYERS

DECOR FILM
indistinguishable
from the real thing

COMFORT
warm & quiet
underfoot

PRO CORE®
core with extra dent
& impact resistance

BALANCING LAYER
extra stability

SUSTAINABLE
attached cork
underlayment



100% waterproof

100% vedenpitävä - 100% Vattentåligt -
100% Vanntett - 100% vandfast



Extremely stable

Erittäin vakaa - Dimensionsstabil -
Ekstrem stabil - Ekstremt stabilt



No acclimatisation necessary

Akklimatisointia ei tarvita - Utan akklimatisering -
Ingen akklimatisering nødvendig - Skal ikke akklimatiseres



Easy to install

Helppo asentaa - Enkelt att installera -
Lett og legge - Let at installere



Installation on any surface

Asennus mille tahansa pinnalle - Alla typer av underlag -
Kan installeres over alle typer overflate -
Monteres på enhver overflade



Reduces noise

Vähentää melua - Minskar ljud -
Reduserer støy - Dæmper støj



Wear resistant

Kulutusta kestävä - Slitstyrka - Slitesterk - Slidstærk



Pet proof

Lemmikkieläinten kestävä - Husdjursäkert -
Kjæledyr styrke - Velegnet til kæledyr



Electrostatic performance

Sähköstaattinen suorituskyky - Mot statisk elektrisitet -
Elektrostatisk ytelse - Antistatisk



Ideal for underfloor heating & cooling

Ihanteellinen lattialämmitykselle ja -jäähdytykselle -
Lämpligt för värmegolv - Ideal for gulvvarme -
Ideel for gulvvarme og gulvkøling

Floors with attitude

SurPlus brings you eccentric and bold floors for demanding locations such as shops, offices, and public buildings. Built to last, for high traffic residential and commercial use.

Dare to be different.

SUR-PLUS

Matching your projects

PLANKS


1220 x 183 mm

 5,00 mm
  0,55 mm
  12 pcs
2,68 m²
± 22 kg

PLANKS

1220 x 127 mm

 5,00 mm
  0,55 mm
  14 pcs
2,17 m²
± 18 kg

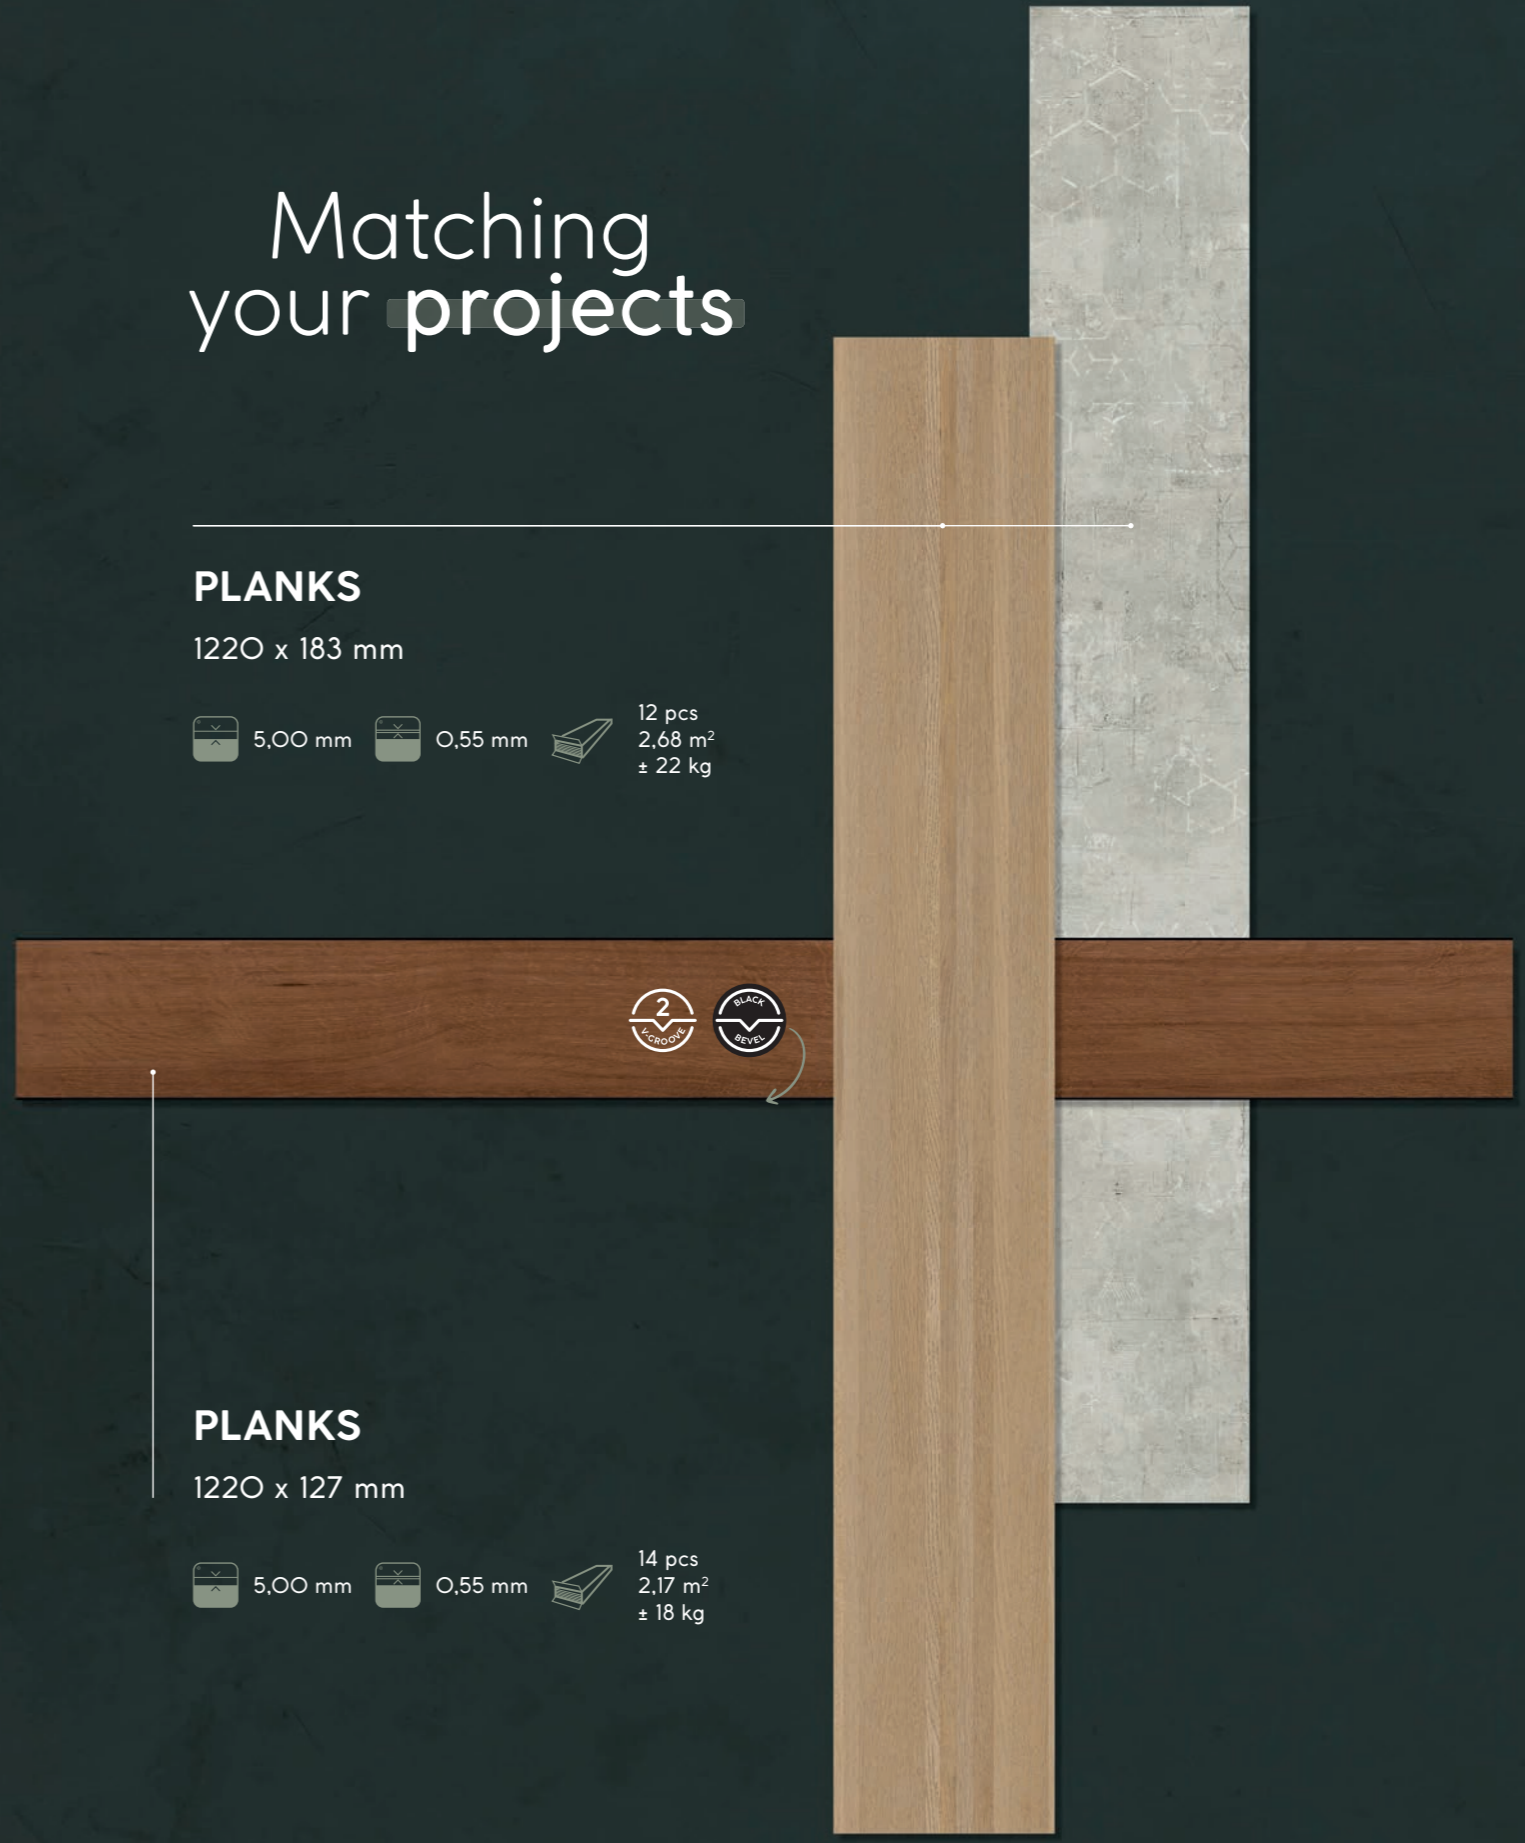




PLINTH 70 MD10 4047



NAVYTEC 47

50 RLVE 4047
1220 x 127 x 5,0 mm

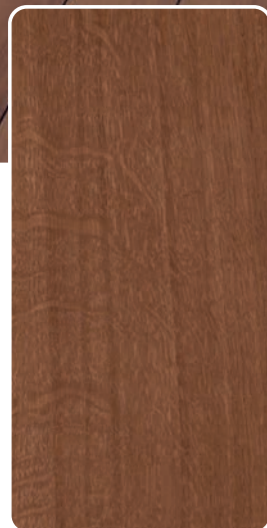

NAVYTEC 83

50 RLVE 4083
1220 x 127 x 5,0 mm



NOBLE OAK 55

50 RLV 3955
1220 x 183 x 5,0 mm



PLINTH 70 MD10 3955






NOBLE OAK 14 50 RLV 3914



GRAPHIC 97

50 RLV 3897
1220 x 183 x 5,0 mm

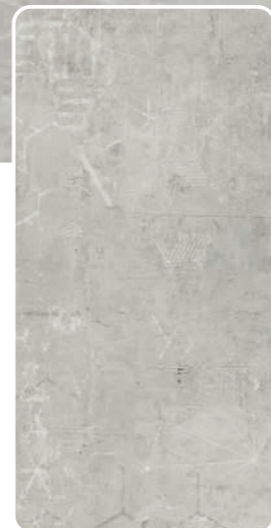

GRAPHIC 93

50 RLV 3893
1220 x 183 x 5,0 mm



PLINTH 70 MDIO 3673




ELEGANCE OAK 73

50 RLV 3673
1220 x 183 x 5,0 mm




PLINTH 70 MDIO 3676
70 QRIO 3676

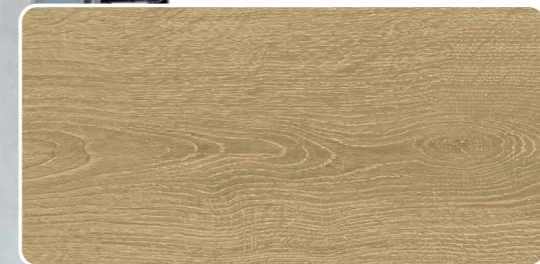

ELEGANCE OAK 76

50 RLV 3676
1220 x 183 x 5,0 mm

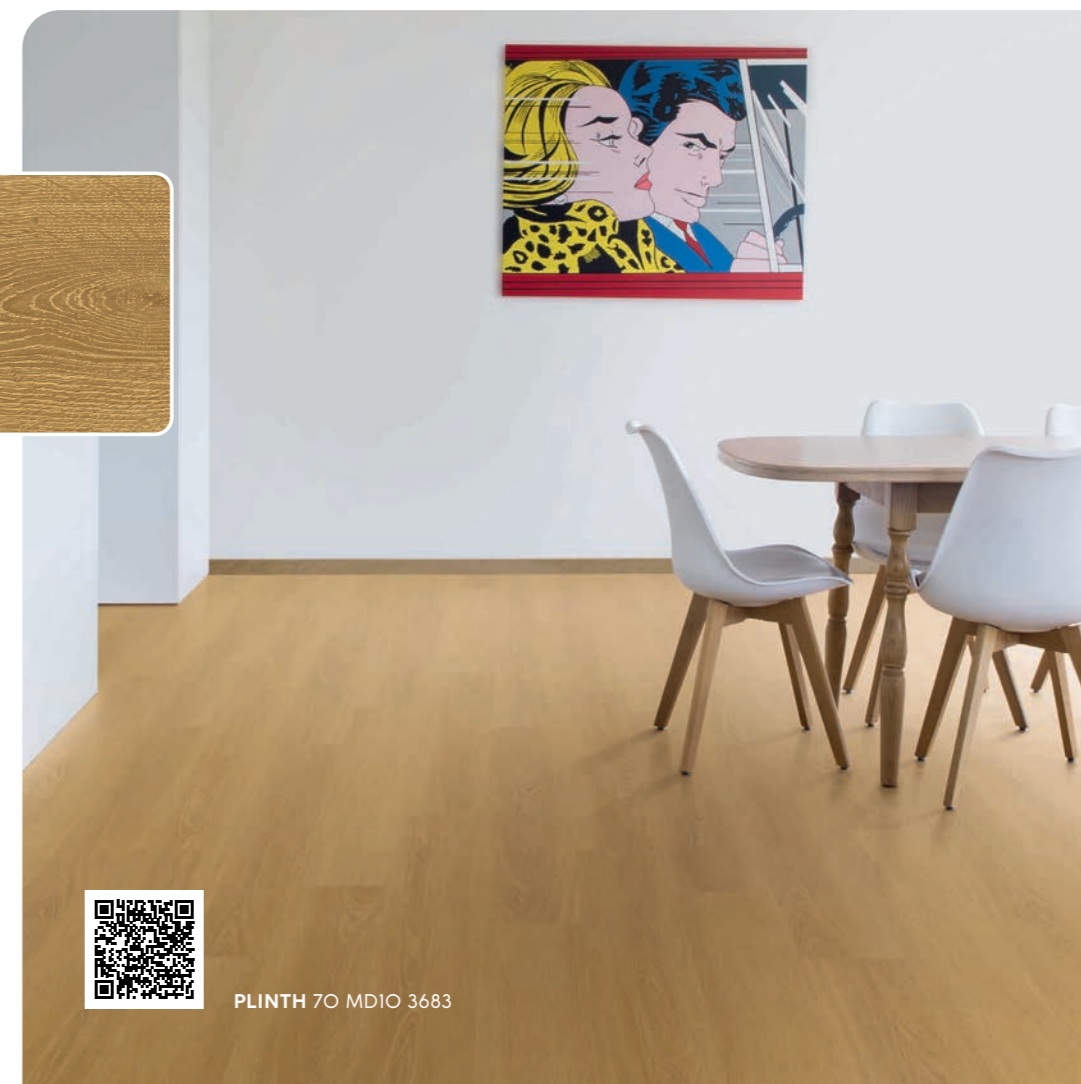

ELEGANCE OAK 83

50 RLV 3683
1220 x 183 x 5,0 mm



PLINTH 70 MDIO 3683




GRAPHIC 93 50 RLV 3893




PLINTH 70 MDIO 3585

ROYAL WALNUT 85

50 RLV 3585
1220 x 183 x 5,0 mm

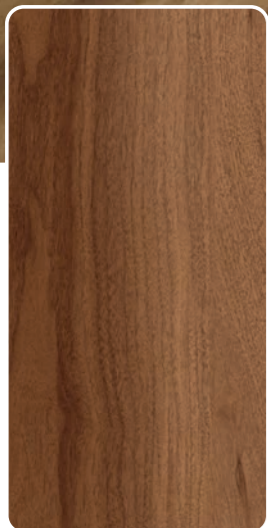

PLINTH 70 MDIO 3794
70 QRIO 3794

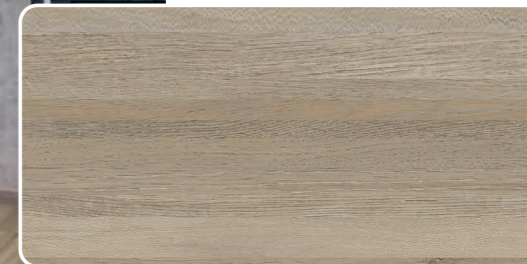

INDUSTRY OAK 94

50 RLV 3794
1220 x 183 x 5,0 mm



PLINTH 70 MDIO 3774




INDUSTRY OAK 74

50 RLV 3774
1220 x 183 x 5,0 mm



PLINTH 70 MDIO 3914

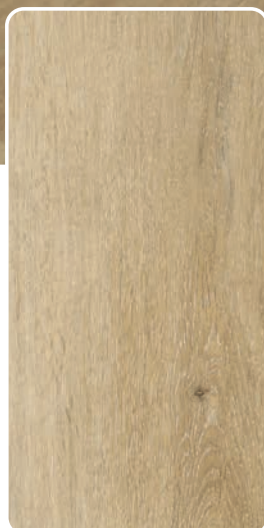



NOBLE OAK 14

50 RLV 3914
1220 x 183 x 5,0 mm

Accessories

Paintable skirtings

Our paintable skirtings are 100% waterproof and shock resistant.




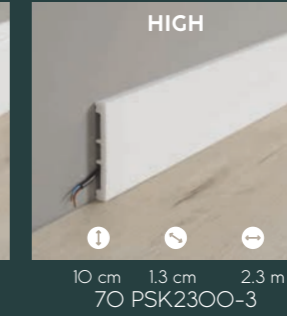


Matching design accessories

Our design accessories match the design of your floor & are also 100% waterproof and shock resistant.



..... = Matching design reference



Installation

Easy installation

COREtec® floors have the easiest install on the market.

Watch our installation video on our website.
www.coretecfloors.com



Maintenance

The COREtec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



80 CCS 3400

Technical specifications

LEVEL OF USE

Käyttöluokka / Klassificering
användningsområde / Bruksklasse /
Anvendelsesgrad
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Geometriset ominaisuudet / Geometrisk
karakteristik / Geometriske kjennetegn /
Geometriske egenskaber
Conform (EN 17539)

WEAR RESISTANCE

Kulutuksenkesto / Slitstyrka /
Slitstyrke / Slidstyrke
Pass 5 000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Pyörällisen toimistotuolin kesto /
Tålighet mot rullhjul / Motstandsdyktighet /
Modstandsdygtighed over for hjulstol
Pass 25 000 cycles (ISO 4918)

EFFECT OF FURNITURE LEG

Huonekalun jalkojen kesto /
Verkan från möbelben / Effekt møbelbein /
Virkning af møbelben
No visible change (EN 1658)

RESIDUAL INDENTATION

Jännöspainuma / Beständighet mot
intrycksmärken / Motstandsdyktighet mot
tryckmerker / Resterende indtryk
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Tahraantumisenkesto / Fläckbeständighet /
Motstandsdyktighet mot flekker /
Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Lukituksen vahvuus / Låsingsstyrka /
Låsestabilitet / Låsingsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Mittavakaus / Dimensionsstabilitet vid
värmepåverkan / Formstabilitet /
Dimensionel stabilitet
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Valonkesto / Färghärdighet / Lysfasthet /
Farveægthed over for lys
> grade 6 (ISO 105-B-02)

IMPACT SOUND REDUCTION

Askeläänen parannusarvo / Ljudisolering /
Akustisk isolasjon (lydisolering) /
Reduktion af stødlyd
 $\Delta L_w = 17$ dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS

Formaldehydiluokka / Formaldehydemission /
Formaldehyd emisjonsgruppe /
Formaldehydemissionsklasse
E1 (EN 717-1)

FIRE CLASSIFICATION

Paloluokka / Flamsäkerhet /
Brannklasse / Brandklassificering
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Kitka / Halksäkerhet /
Sklimotstand / Skridsikkerhed
DS - RIO (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Lattialämmitys / Värmegolv /
Gulvvarme / Gulvvarme
Suitable


ELECTROSTATIC PERFORMANCE

Sähköstaattinen varautuminen / Prestanda statisk
elektricitet / Elektrostatisk ytelse (antistatisk) /
Elektrostatisk ydeevne
≤ 2 kV (EN 1815)

THERMAL RESISTANCE

Lämmönvastus / Värmemotstånd /
Varmebestandighet / Termisk modstandsdygtighed
0.0318 m²-K/W (EN 12667)

Name	SO Number	Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M ² / box	± Weight box (kg)
Navytec 47	5O RLVE 4047	1220	127	5	•	•	14	2.17	18
Navytec 83	5O RLVE 4083	1220	127	5	•	•	14	2.17	18
Royal Walnut 85	5O RLV 3585	1220	183	5			12	2.68	22
Elegance Oak 73	5O RLV 3673	1220	183	5			12	2.68	22
Elegance Oak 76	5O RLV 3676	1220	183	5			12	2.68	22
Elegance Oak 83	5O RLV 3683	1220	183	5			12	2.68	22
Industry Oak 94	5O RLV 3794	1220	183	5			12	2.68	22
Industry Oak 74	5O RLV 3774	1220	183	5			12	2.68	22
Graphic 97	5O RLV 3897	1220	183	5			12	2.68	22
Graphic 93	5O RLV 3893	1220	183	5			12	2.68	22
Noble Oak 55	5O RLV 3955	1220	183	5			12	2.68	22
Noble Oak 14	5O RLV 3914	1220	183	5			12	2.68	22

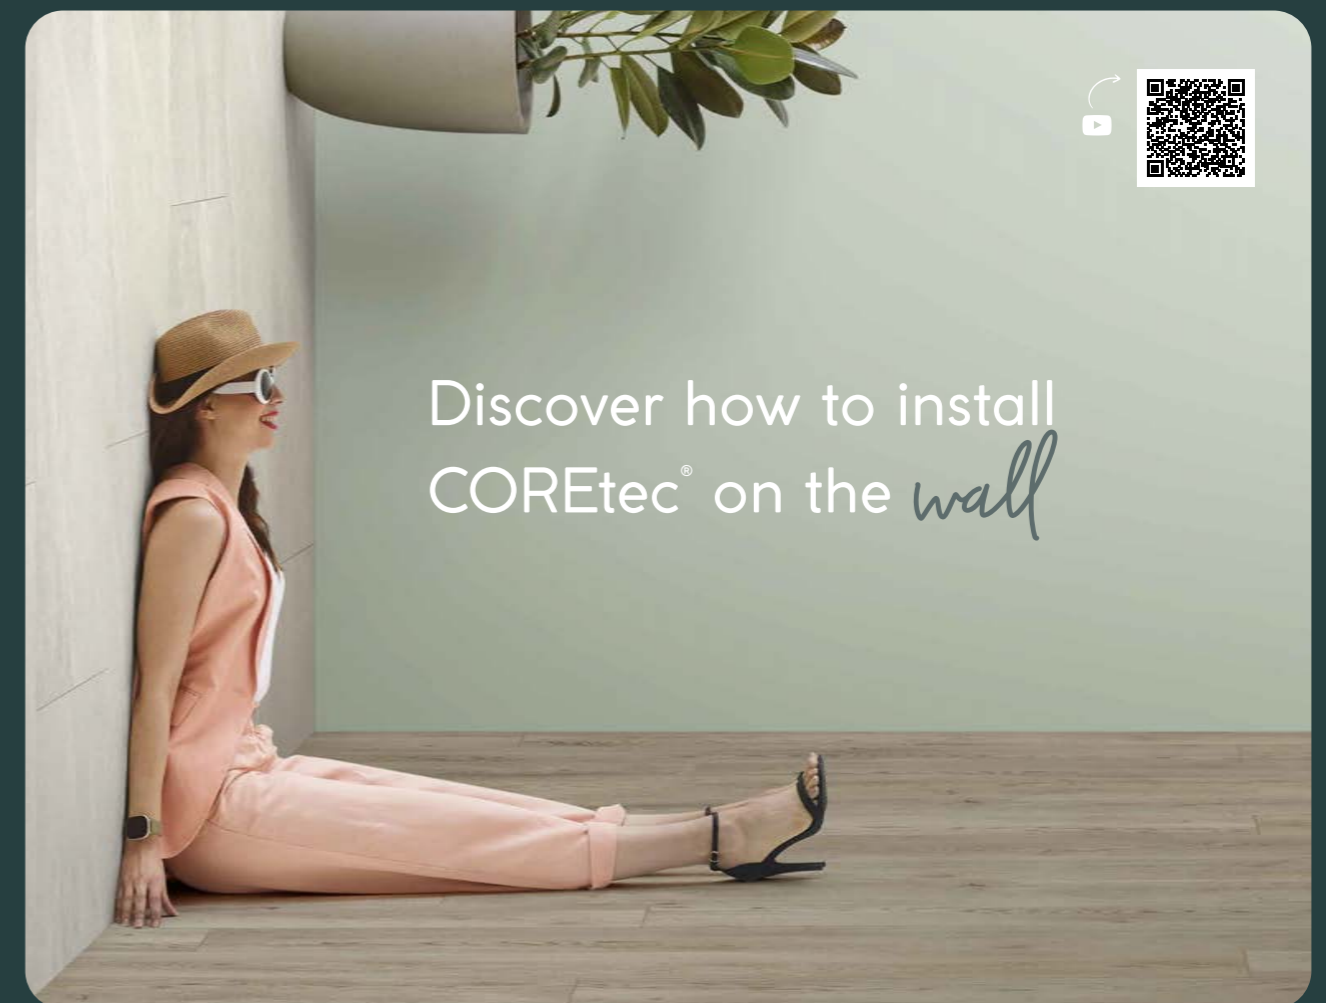



It's in our *cove* to adore nature

Our commitments from us to you.

-  **Choose me once, love me for life**
We believe in a world where things last! For a lifetime, and longer. That's good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.
-  **Breathe healthy air**
The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.
-  **Sustainable cork underlay**
Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO₂ emissions.
-  **We can prove it**
Don't take our word for it, look at the proof! COREtec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.
-  **Second Life**
So you're changing your floor? Why not give the old COREtec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.
-  **Do your bit for forest conservation**
There is no wood in a COREtec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.



COREtec® floors are
that good, somebody else
can re-*enjoy* it.

Learn how your COREtec® floor gets a second life.



COREtec®, the natural choice



Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
 Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
 Garanti (år) Garantien gäller tillverkningsfel och för tidig utslitning vid normalt användande.
 Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.



Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be · www.coretecfloors.com