

NATURALS

Collection



Coretec®

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.



Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® Cleaning Kit.



100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a lifetime residential warranty.

Time saving solution

Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.


Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



Sound Core® 8 mm

Silent & strong, down to the core

At Coretec®, we're proud to offer the most complete collection of 100% waterproof floors, so you can express what makes you, you.

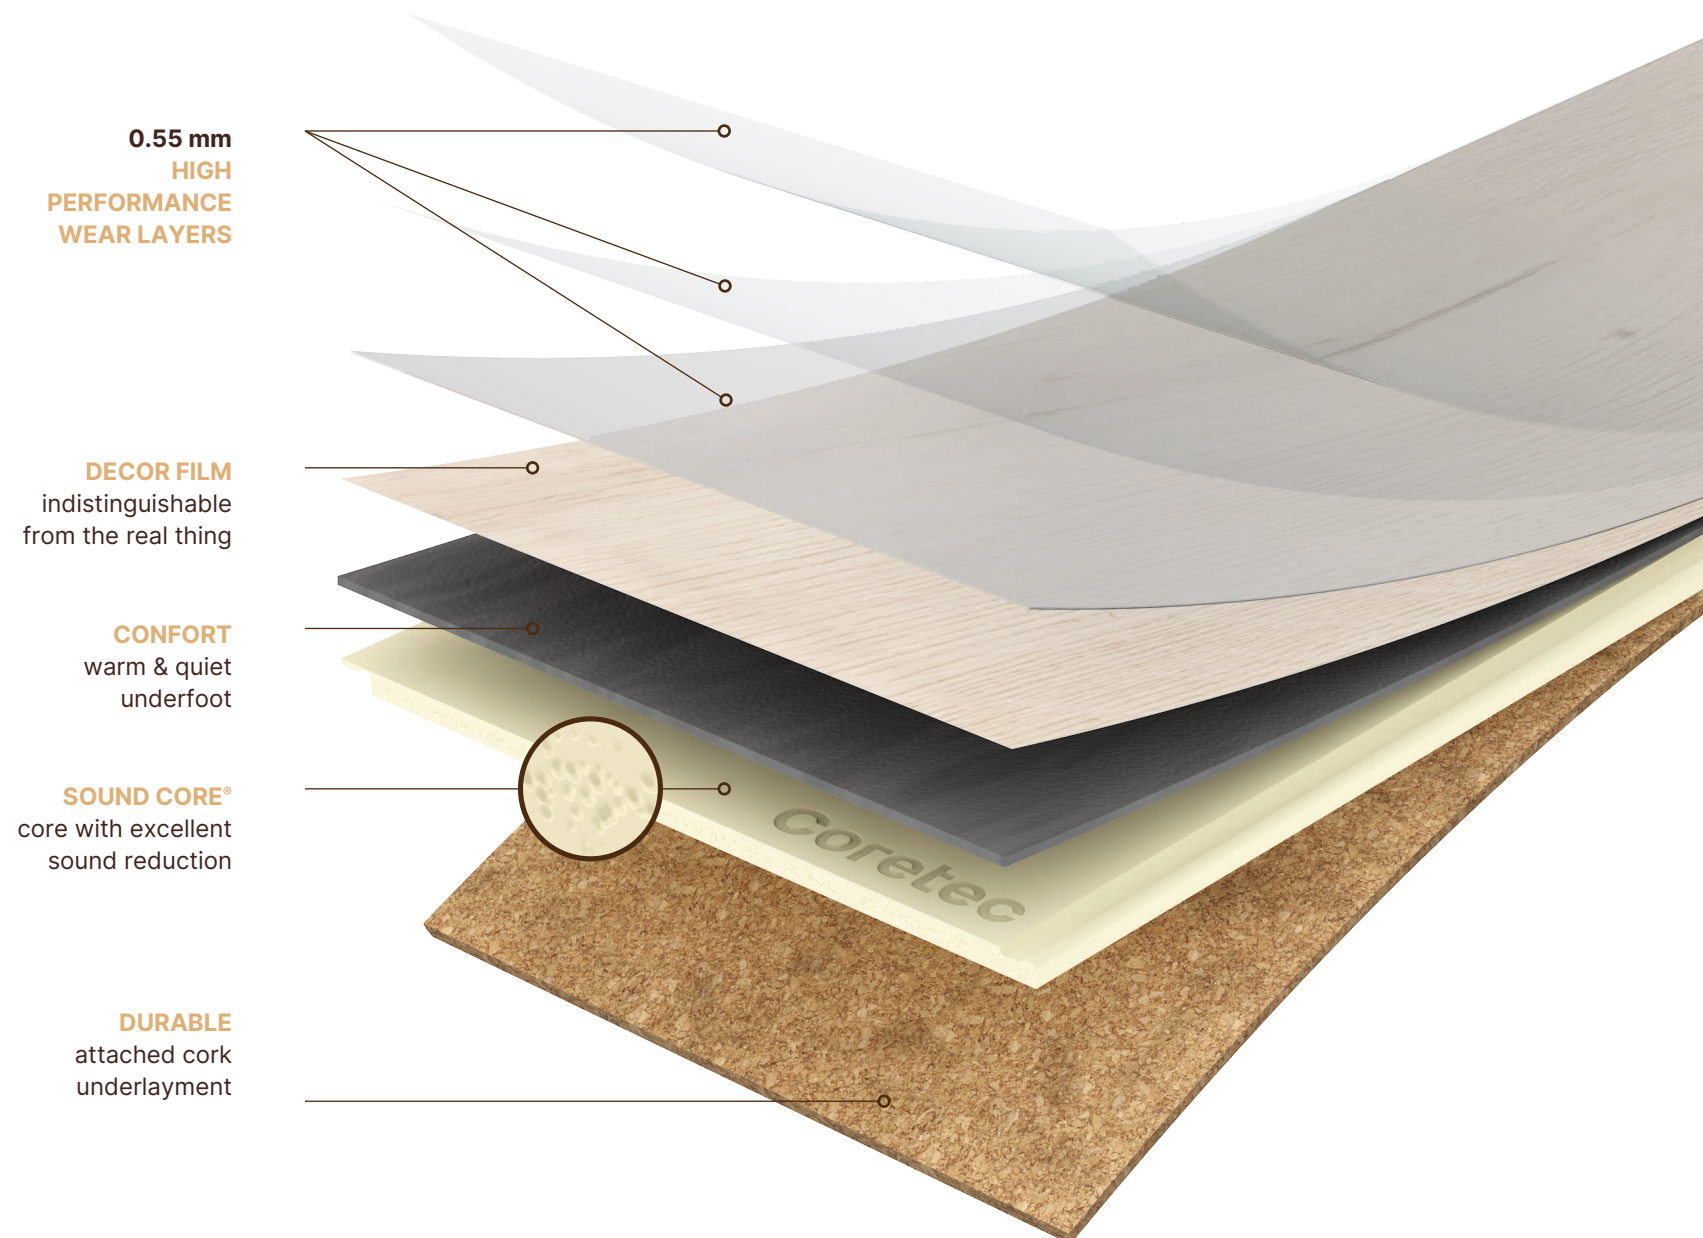

100 % water resistant



Extremely stable



No acclimatisation necessary



Easy to install



Installation on any surface



Reduces noise



Wear resistant



Pet proof



Electrostatic performance



Suitable for underfloor heating & cooling



MULTI SERIES

1800 SERIES

1500 SERIES



1200 SERIES

HERRINGBONE SERIES

TILE SERIES



Has pressed bevels on the long & short sides



Has bevels on the long sides



Has bevels on the long & short sides



The embossing follows the structure of the wood for a real-life touch

NATURALS
Collection

AUTHENTIC TO THE CORE - AUTHENTIC TO THE CORE



Pick your colour

Planks



DESERT 50 LVP 805



SWAMP 50 LVPE 859



FOREST 50 LVP 806
FOREST HB 50 LVPEH 806



TIMBER 50 LVPE 853



FLORA 50 LVRE 2554
FLORA HB 50 LVRH 2554



AURORA 50 LVRE 2756
AURORA HB 50 LVRH 2756



PAMPAS 50 LVRE 2955



EILA 50 LVRE 3173



BARLEY 50 LVRE 2754
BARLEY HB 50 LVRH 2754



FERN 50 LVREM 3273



BLOSSOM 50 LVRE 2514



JUNIPER 50 LVRE 2713
JUNIPER HB 50 LVRH 2713



HAZE 50 LVPE 855



IRIS 50 LVRE 2995




MEADOW 50 LVP 807
MEADOW HB 50 LVPEH 807



LEAF 50 LVPE 858



LUMBER 50 LVP 804
LUMBER HB 50 LVPEH 804



ACORN 50 LVPE 854
ACORN HB 50 LVPEH 854



MARLOW 50 LVRE 2884



SORREL 50 LVRE 2556
SORREL HB 50 LVRH 2556




BARK 50 LVPE 856



PERUVIA 50 LVRE 3084



ELON 50 LVRE 2887



JUGLANS 50 LVRE 3088
JUGLANS HB 50 LVRH 3088



RAVEN 50 LVRE 3188


Tiles



THABOR 50 LVTE 1903



ALBARON 50 LVTE 3392



VELETA 50 LVTE 3394



EVEREST 50 LVTE 1901



ANETO 50 LVTE 3473




JURA 50 LVTE 1907



STROMBOLI 50 LVTE 3493



MATTERHORN 50 LVTE 1905



ALGAR 50 LVTE 3396



BERNER 50 LVTE 3399



CANYON 50 LVTE 1906




Veleta 50 LVTE 3394
Plinth 70 MS9 3394



Multi 2V E series

Fern

50 LVREM 3273

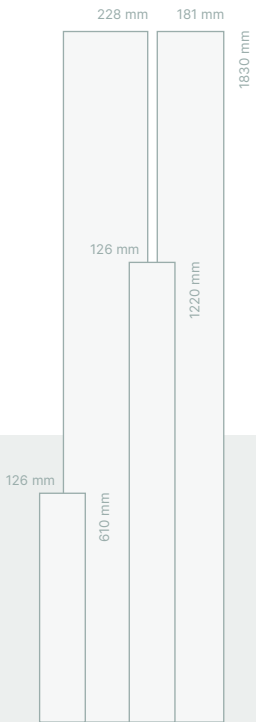

Multi series

1 box contains planks in following dimensions:

1830 × 228 × 8 mm 1220 × 126 × 8 mm
1830 × 181 × 8 mm 610 × 126 × 8 mm






1800 2V E series

Peruvia

50 LVRE 3084

1830 × 230 × 8 mm

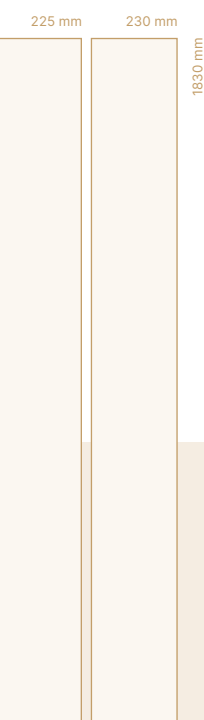

1800 series

1830 × 225 × 8 mm

1830 × 230 × 8 mm





1800 4V PB E series

Eila

50 LVRE 3173
1830 × 225 × 8 mm



1800 4V PB E series

Raven

50 LVRE 3188
1830 × 225 × 8 mm





No expansion
gap needed!




1800 2V E series

Aurora

50 LVRE 2756
1830 × 230 × 8 mm



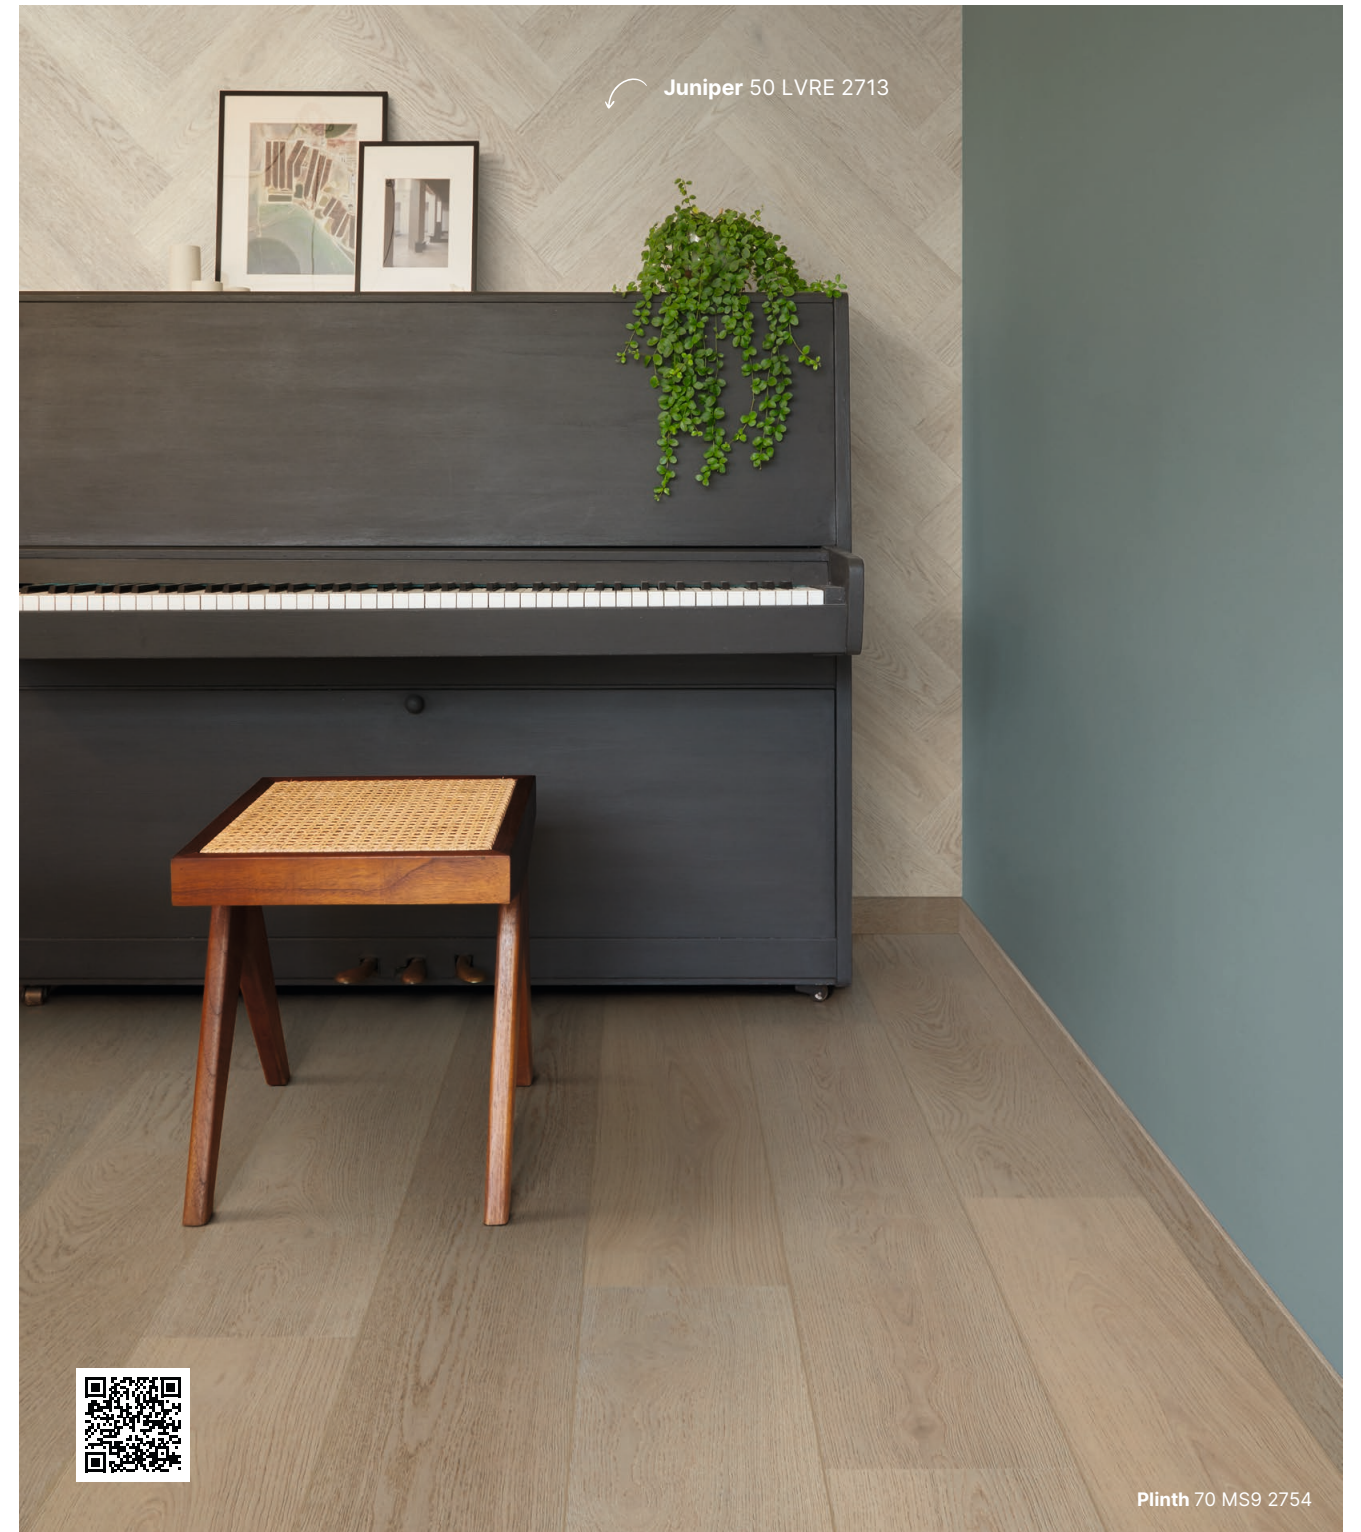

1800 2V E series

Juniper

50 LVRE 2713
1830 × 230 × 8 mm



1800 2V E series

Barley

50 LVRE 2754
1830 × 230 × 8 mm





1800 2V E series

Juglans

50 LVRE 3088
1830 × 230 × 8 mm





Plinth 70 MS9 2884



Marlow 50 LVRE 2884



1800 2V E series

Marlow

50 LVRE 2884
1830 × 230 × 8 mm



1800 2V E series

Elon

50 LVRE 2887
1830 × 230 × 8 mm





1500 2V E series


Sorrel

50 LVRE 2556

1520 × 181 × 8 mm



Flora 50 LVRE 2554

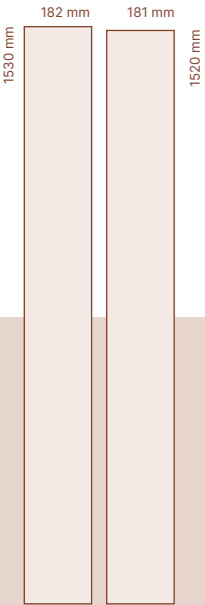

1500 series

1530 × 182 × 8 mm

1520 × 181 × 8 mm





Plinth 70 MS9 2995



1500 2V series

Iris

50 LVRE 2995
1530 × 182 × 8 mm



1500 2V series

Pampas

50 LVRE 2955
1530 × 182 × 8 mm





1500 2V E series

Blossom

50 LVRE 2514
1520 × 181 × 8 mm



1500 2V E series

Flora

50 LVRE 2554
1520 × 181 × 8 mm





1200 MB series

Forest

50 LVP 806
1220 × 182 × 8 mm



1200 series

1200 × 182 × 8 mm





1200 MB series

Lumber

50 LVP 804
1220 × 182 × 8 mm



1200 MB series

Desert

50 LVP 805
1220 × 182 × 8 mm



1200 MB series

Meadow

50 LVP 807
1220 × 182 × 8 mm




1200 4V series

Timber

50 LVPE 853
1220 × 182 × 8 mm





1200 4V series

Acorn

50 LVPE 854
1220 × 182 × 8 mm



1200 4V series

Haze

50 LVPE 855
1220 × 182 × 8 mm





1200 4V series

Swamp

50 LVPE 859
1220 × 182 × 8 mm





1200 4V series

Bark

50 LVPE 856
1220 × 182 × 8 mm



1200 4V series

Leaf

50 LVPE 858
1220 × 182 × 8 mm






HB E series

Aurora

50 LVRH 2756
604 × 151 × 8 mm

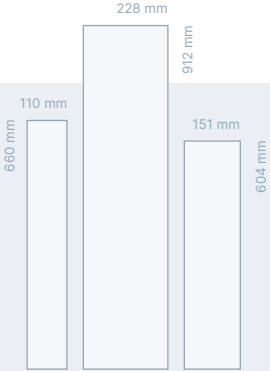

Herringbone series

660 × 110 × 8 mm
604 × 151 × 8 mm
912 × 228 × 8 mm





Plinth 70 MS9 2554



WB MB E series

Sorrel

50 LVRH 2556
912 × 228 × 8 mm



WB MB E series

Flora

50 LVRH 2554
912 × 228 × 8 mm





HB 4V series

Lumber

50 LVPEH 804
660 × 110 × 8 mm



HB 4V series

Forest

50 LVPEH 806
660 × 110 × 8 mm





HB 4V series

Acorn

50 LVPEH 854
660 × 110 × 8 mm



HB 4V series

Meadow

50 LVPEH 807
660 × 110 × 8 mm





HB E series

Juniper

50 LVRH 2713
604 × 151 × 8 mm





HB E series

Barley

50 LVRH 2754
604 × 151 × 8 mm



HB E series

Juglans

50 LVRH 3088
604 × 151 × 8 mm



**Defined by the
details of nature**

NATURALS
Collection






Tile series

Jura

50 LVTE 1907
915 × 471 × 8 mm

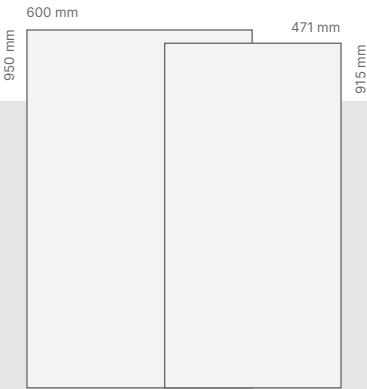

Tile series

950 × 600 × 8,8 mm
915 × 471 × 8 mm





Tile series

Everest

50 LVTE 1901
915 × 471 × 8 mm



Tile series

Thabor

50 LVTE 1903
915 × 471 × 8 mm





FOREST STAIRS



Tile series

Matterhorn

50 LVTE 1905
915 × 471 × 8 mm



Tile series

Canyon

50 LVTE 1906
915 × 471 × 8 mm





Megatile 4V series

Aneto

50 LVTE 3473
950 × 600 × 8,8 mm



↪ **Aneto 50 LVTE 3473**

Plinth 70 MS9 3473



Plinth 70 MS9 3394



Megatile 4V series

Veleta

50 LVTE 3394
950 × 600 × 8,8 mm



Megatile 4V series

Algar

50 LVTE 3396
950 × 600 × 8,8 mm





PLINTH 70 MS9 3392



Megatile 4V series

Berner

50 LVTE 3399
950 × 600 × 8,8 mm



Megatile 4V series

Albaron

50 LVTE 3392
950 × 600 × 8,8 mm





Megatile 4V series

Stromboli

50 LVTE 3493
950 × 600 × 8,8 mm



Accessories

Paintable skirtings



CASTLE



13.8 cm 1.8 cm 2 m
70 PSK2000-1

HIGH



10.2 cm 1.3 cm 2.3 m
70 PSK2300-3

COVER



10 cm 2.2 cm 2 m
70 PSK2000-2

MIDDLE



6.6 cm 1.3 cm 2.3 m
70 PSK2300-2

LOW



4 cm 1 cm 2.3 m
70 PSK2300-1




Discover all accessories

Matching design accessories



... = matching design reference

MODERN




5.8 cm 1.3 cm 2.4 m
70MS9

Aluminium profiles




2001 Matte black 2002 Brushed aluminium 2003 Champagne bronze

T-PROFILE



8-15 mm 3.4 cm 2 m
70 ATP SC

REDUCER



8-15 mm 4.4 cm 2 m
70 ARP SC

END PROFILE




8-15 mm 2.6 cm 2 m
70 AEP SC

Installation


Easy installation


Coretec® floors have the easiest install on the market.

Watch our installation video on our website www.coretecfloors.com or scan the QR code.

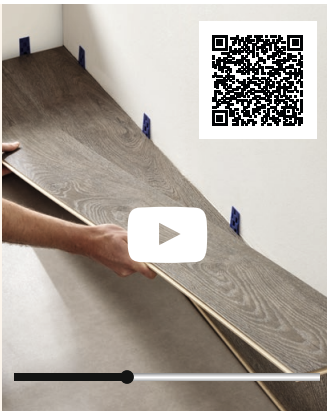

Discover how to install Coretec® on the wall

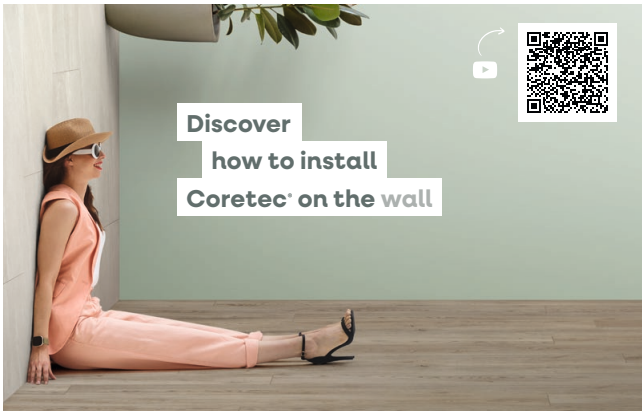

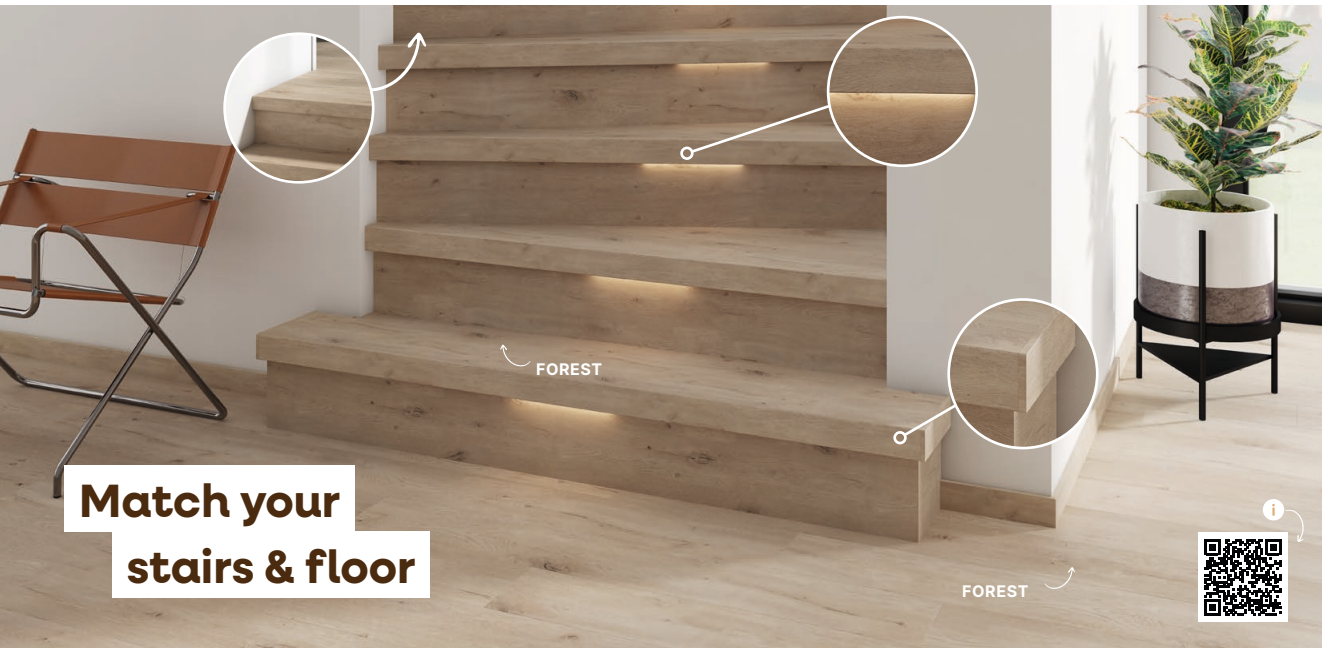

Match your stairs & floor



Herringbone Series variations


Mix & match your own style with our herringbone planks.

Please consult our installation guide for more information about specific requirements, such as expansion gaps and material needs.







SINGLE




DOUBLE




TRIPLE




SQUARE



BRICK



CORNER



MOSAIC

Multi Series variations


Create your own style with four different plank sizes. The layout you choose is completely up to you!

Please consult our installation guide for more information about specific requirements, such as expansion gaps and material needs.







STANDARD



OPTION 1



OPTION 2



OPTION 3

Maintenance

The Coretec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



Technical specifications (IT - SP - PT)

Level of use

Classe d'uso / Clasificación de uso /
Classe de utilização
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics

Fantasie geometriche / Características
geométricas / Características geométricas
Conform (EN 17539)

Wear resistance

Resistenza all'usura / Resistencia al desgaste / Re-
sistência ao desgaste
Pass 5000 cycles (ISO 24338)

Castor chair resistance

Resistenza alle sedie con ruote / Resistencia
a sillas con ruedas / Resistência a cadeira de rodas
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg

Effeto furniture leg / Efecto de la patade un mueble /
Efeito da perna do móvel
No visible change (EN 16581)

Residual indentation

Indentazione residua certificata / Huella residual /
Recuo residual
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining

Resistenza alle macchie / Resistencia al manchado /
Resistência a manchas
5 (no visible change) (EN 438-2)

Locking strength

Chiusura perfetta con sistema a click /
Resistencia a la tracción / Força de encaixe
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability

Stabilità dimensionale / Estabilidad dimensional /
Estabilidade dimensional
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

Resistenza alla luce / Solidez del color a luz
artificial / Resistência da cor à luz
> grade 6 (EN ISO 105-B-02)

Impact sound reduction

Isolamento acustico / Aislamiento acústico /
Isolamento acústico
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)
ΔL_{LIN} = 10 dB (ISO 10140-3 / EN 717-1)

Formaldehyde emission class

Classe Formaldeide / Emisión formaldehído /
Classificação formaldeído
E1 (EN 717-1)

Fire classification

Classe di resistenza al fuoco / Resistencia al
fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

Slip resistance

Coefficiente dinamico di attrito / Coeficiente de
fricción / Coeficiente de atrito
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating

Riscaldamento a pavimento / Calefacción por
suelo radiante / Aquecimento por piso radiante
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance

Performance elettrostatica / Rendimiento
antiestático / Acumulação de cargas eletrostáticas
≤ 5 kV (EN 1815)

Thermal resistance

Resistenza al calore / Aislamiento térmico /
Isolamento térmico
0.066 m²-K/W (EN 12667)

Technical specifications (FI - SV - NO - DK)

Level of use

Käyttöluokka / Klassificering användningsområde /
Bruksklasse / Anvendelsesgrad
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics

Geometriset ominaisuudet / Geometrisk karakteristik /
Geometriske kjennetegn / Geometriske egenskaber
Conform (EN 17539)

Wear resistance

Kulutuksenkesto / Slitstyrka / Slitestyrke / Slidstyrke
Pass 5000 cycles (ISO 24338)

Castor chair resistance

Pyörällisen toimistotuolin kesto / Tålighet mot
rullhjul / Motstandsdyktighet / Modstandsdygtighed
over for hjulstol
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg

Huonekalun jalkojen kesto / Verkan från möbelben /
Effekt møbelbein / Virkning af møbelben
No visible change (EN 16581)

Residual indentation

Jännöspainuma / Beständighet mot intrycks-
märken / Motstandsdyktighet mottrykkmerker /
Resterende indtryk
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining

Tahraantumisenkesto / Fläckbeständighet /
Motstandsdyktighet mot flekker /
Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

Locking strength

Lukituksen vahvuus / Låsningsstyrka /
Låsestabilitet / Låsningsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability

Mittavakaus / Dimensionsstabilitet vid värmepåverkan /
Formstabilitet / Dimensionel stabilitet
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

Valonkesto / Färghärdighet / Lysfasthet / Låsningsstyrke
> grade 6 (EN ISO 105-B-02)

Impact sound reduction

Askeläänen parannusarvo / Ljudisolering / Akustisk
isolasjon (lydisolering) / Reduktion af stødlyd
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)
ΔL_{LIN} = 10 dB (ISO 10140-3 / EN 717-1)

Formaldehyde emission class

Formaldehydilouokka / Formaldehydemission /
Formaldehyd emisjonsgruppe /
Formaldehydemissionsklasse
E1 (EN 717-1)

Fire classification

Paloluokka / Flamsäkerhet / Brannklasse /
Brandklassificering
Bfl - S1 (EN 13501)

Slip resistance

Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating

Lattialämmitys / Värmegolv / Gulvvarme /Gulvvarme
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance

Sähköstaattinen varautuminen / Prestanda statisk
elektricitet / Elektrostatisk ytelse (antistatisk) /
Elektrostatisk ydeevne
≤ 5 kV (EN 1815)

Thermal resistance

Lämmönvastus / Värmemotstånd /
Varmebestandighet / Termisk modstandsdygtighed
0.066 m²-K/W (EN 12667)

Technical specifications (SK - PL - RU - HU - CZ - LT)

Level of use

Úroveň použitia / Klasa ścieralności / Класс
спользования / Európai besorolás / Úroveň použití /
Atsparumo klasė
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics

Geometrické parametre / Charakterystyka Geometry-
czna / геометрические характеристики / Geometriai
jellemző / Rozměry / Geometrinės savybės
Conform (EN 17539)

Wear resistance

Odolnosť voči opotrebeniu / Wytrzymałość na zużycie
/ износостойкость / Korásállóság / Odolnost proti
opotrebení / Atsparumas dilimui
Pass 5000 cycles (ISO 24338)

Castor chair resistance

Odolnosť voči kolieskam na stoličke / Odporność na
krzesła obrotowe z kółkami / Стойкость к креслам
с роликами / Görgös szék teszt / Odolnost vůči
kolečkovým židlým / Atsparumas kėdžių ratukams
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg

Efekt z nôh nábytku / Wpływ nogi meblowej /
воздействие мебельных ножек / Bútorlábhatás /
Vliv nábytkové nožky / Baldų poveikis
No visible change (EN 16581)

Residual indentation

Trvalá deformácia / Pozostałe wgniecenie / остаточные
вмятины / Megmaradó benyomódás / Trvalá deformace
/ Likęs įdubimas
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining

Odolnosť voči napúšťaniu farbou / Odporność na barwie-
nie / устойчивость к пятнообразованию / Foltállóság /
Odolnost proti vzniku skvrn / Atsparumas dėmėms
5 (no visible change) (EN 438-2)

Locking strength

Pevnosť pripojenia / Wytrzymałość blokowania /
прочность крепления / Záróerő / Pevnostzajištění /
Blokavimo jėga
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability

Rozmerová stabilita / Stabilność wymiarowa /
Стабильность размеров / Méretstabilitás / Rozměrová
stabilita / Matmenų stabilumas
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

Stálosť farby na svetle / Odporność koloru na światło /
устойчивость окраски к свету / Színtartósság / Stálo-
barevnost na světle / Spalvų atsparumas šviesa
> grade 6 (EN ISO 105-B-02)

Impact sound reduction

Akustická izolácia / Izolacja akustyczna Звукоизоляция /
Hangszigetelés / Akustická izolace / Garso slopinimas
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)
ΔL_{LIN} = 10 dB (ISO 10140-3 / EN 717-1)

Formaldehyde emission class

Formaldehydová skupina / Emisja formaldehydu /
Класс эмиссии формальдегида / Formaldehyd csoport /
Formaldehydová skupina / Formaldehyde group
E1 (EN 717-1)

Fire classification

Klasifikácia voči požiaru / klasyfikacja ogniowa / класс
огнестойкости / Tűzállósági osztály / Požární klasifikace
/ Degumo klasifikacija
Bfl - S1 (EN 13501)

Slip resistance

Protišmykovosť / Śliskość / Стойкость к скольжению /
Csúszásmentes / Protiskluznost / Slidumo klasė
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating

Podlahové vykurovanie / Ogrzewanie podłogowe /
Полы с подогревом / Padlófűtésre / Podlahové
vykurování / Šildomos grindys
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance

Elektrostatické prevedenie / Akumulacja ładunków elek-
trostatycznych / Электростатичность / Elektromos
feltöltődés / Elektrostatické provedení / Antistatiskumas
≤ 5 kV (EN 1815)

Thermal resistance

Termelná odolnosť / Odporność cieplna / термостойкость
/ Hőállóság / Teplotní odolnost / Terminis atsparumas
0.066 m²-K/W (EN 12667)

Series	Name	SKU Number	Length (mm)	Width (mm)	Thickness (mm)						Pieces / box	M ² / box	± Weight box (kg)
MULTI 2VE	Fern	50 LVREM 3273	610	126	8		•			•	2		
			1830	181	8		•			•	4		
			1220	126	8		•			•	2	2,62	24
			1830	228	8		•			•	2		
1800 4V PBE	Eila	50 LVRE 3173	1830	225	8			•	•	•	6	2,47	20
	Raven	50 LVRE 3188	1830	225	8			•	•	•	6	2,47	20
1800 2V E	Aurora	50 LVRE 2756	1830	230	8		•			•	6	2,53	19
	Juniper	50 LVRE 2713	1830	230	8		•			•	6	2,53	19
	Barley	50 LVRE 2754	1830	230	8		•			•	6	2,53	19
	Juglans	50 LVRE 3088	1830	230	8		•			•	6	2,53	19
	Peruvia	50 LVRE 3084	1830	230	8		•			•	6	2,53	19
	Elon	50 LVRE 2887	1830	230	8		•			•	6	2,53	19
	Marlow	50 LVRE 2884	1830	230	8		•			•	6	2,53	19
1500 2V E	Sorrel	50 LVRE 2556	1520	181	8		•			•	10	2,75	23
	Flora	50 LVRE 2554	1520	181	8		•			•	10	2,75	23
	Blossom	50 LVRE 2514	1520	181	8		•			•	10	2,75	23
1500 2V	Iris	50 LVRE 2995	1530	182	8		•				8	2,23	17
	Pampas	50 LVRE 2955	1530	182	8		•				8	2,23	17
1200 4V	Timber	50 LVPE 853	1220	182	8			•			12	2,66	22
	Acorn	50 LVPE 854	1220	182	8	•		•			12	2,66	22
	Haze	50 LVPE 855	1220	182	8			•			12	2,66	22
	Bark	50 LVPE 856	1220	182	8			•			12	2,66	22
	Leaf	50 LVPE 858	1220	182	8			•			12	2,66	22
	Swamp	50 LVPE 859	1220	182	8			•			12	2,66	22
1200 MB	Lumber	50 LVP 804	1220	182	8	•					12	2,66	22
	Desert	50 LVP 805	1220	182	8						12	2,66	22
	Forest	50 LVP 806	1220	182	8	•					12	2,66	22
	Meadow	50 LVP 807	1220	182	8	•					12	2,66	22
WB MB E	Sorrel	50 LVRH 2556	912	228	8					•	A: 6 - B: 6	2,5	21
	Flora	50 LVRH 2554	912	228	8					•	A: 6 - B: 6	2,5	21
HB E	Aurora	50 LVRH 2756	604	151	8					•	A: 16 - B: 16	2,92	23
	Juniper	50 LVRH 2713	604	151	8					•	A: 16 - B: 16	2,92	23
	Barley	50 LVRH 2754	604	151	8					•	A: 16 - B: 16	2,92	23
	Juglans	50 LVRH 3088	604	151	8					•	A: 16 - B: 16	2,92	23
HB 4V	Lumber	50 LVPEH 804	660	110	8			•			A: 16 - B: 16	2,32	19
	Forest	50 LVPEH 806	660	110	8			•			A: 16 - B: 16	2,32	19
	Meadow	50 LVPEH 807	660	110	8			•			A: 16 - B: 16	2,32	19
	Acorn	50 LVPEH 854	660	110	8			•			A: 16 - B: 16	2,32	19
TILE 4V	Everest	50 LVTE 1901	915	471	8			•			6	2,59	23
	Thabor	50 LVTE 1903	915	471	8			•			6	2,59	23
	Matterhorn	50 LVTE 1905	915	471	8	•		•			6	2,59	23
	Canyon	50 LVTE 1906	915	471	8			•			6	2,59	23
	Jura	50 LVTE 1907	915	471	8			•			6	2,59	23
MEGATILE 4V	Veleta	50 LVTE 3394	950	600	8,8			•			4	2,28	21
	Algar	50 LVTE 3396	950	600	8,8			•			4	2,28	21
	Berner	50 LVTE 3399	950	600	8,8			•			4	2,28	21
	Albaron	50 LVTE 3392	950	600	8,8			•			4	2,28	21
	Stromboli	50 LVTE 3493	950	600	8,8			•			4	2,28	21
	Aneto	50 LVTE 3473	950	600	8,8			•			4	2,28	21



Bark 50 LVPE 856



Forest 50 LVPEH 806

It's in our **core** to adore nature



Our commitments



Choose me once, love me for life
We believe in a world where things last! For a lifetime, and longer. That's good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.



Breathe healthy air
The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.



Sustainable cork underlay
Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO₂ emissions.



We can prove it
Don't take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.



Second Life
So you're changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.




Do your bit for forest conservation
There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.

Coretec®



**Coretec® floors are
that good, somebody else
can re-enjoy it.**

Learn how your Coretec® floor gets a second life.

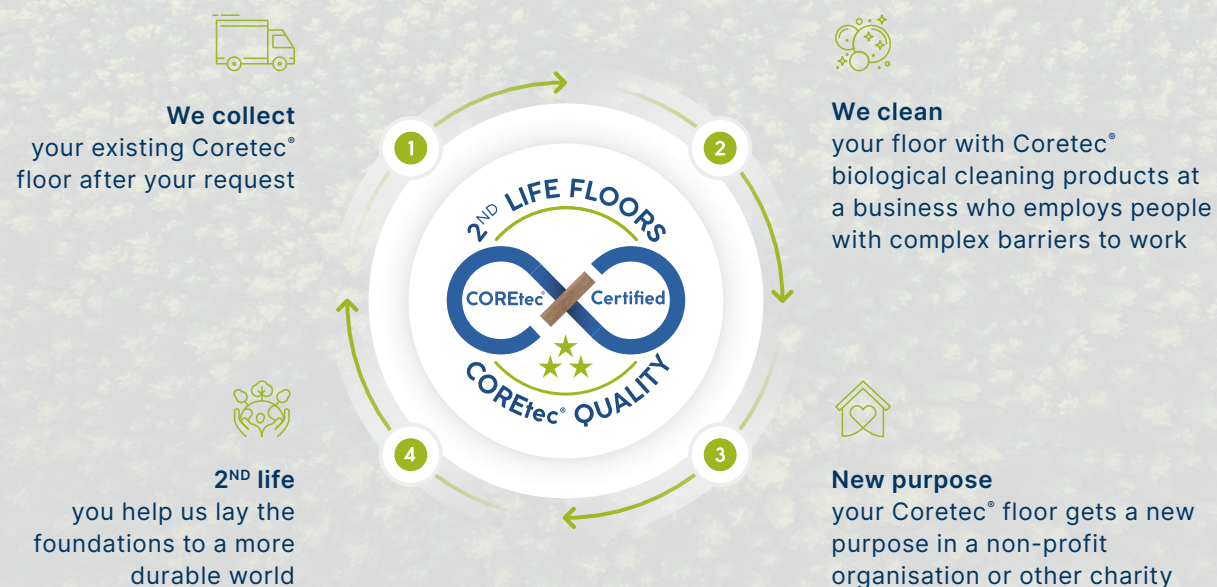

Coretec®, the natural choice



Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.
Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
Garanti (år) Garantien gäller tillverkningsfel och för tidig utslitning vid normalt användande.
Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vzťahuje na vady z výroby a predčasné opotrebení v prípade běžného používání.
Garantija (Metali) Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com



US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF  INDUSTRIES