


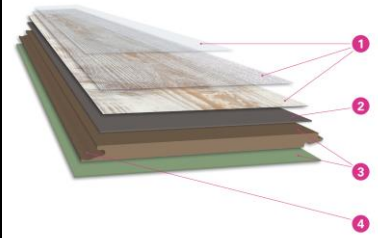
# TECHNICAL CHARACTERISTICS











## wineo 400 Multi-Layer – 2023


Long-lasting multi-layer floor (Multi-Layer) according to DIN EN 16511 for glueless installation

# wineo

	wood L	wood XL	stone L
<b>Format</b>	1222 x 182 mm	1520 x 230 mm	601 x 310 mm
<b>Product thickness</b>	9 mm	9 mm	9 mm
<b>Planks, tiles / m<sup>2</sup> per box</b>	9 / 2.00 m <sup>2</sup>	6 / 2.10 m <sup>2</sup>	9 / 1.68 m <sup>2</sup>
<b>Boxes / m<sup>2</sup> per pallet</b>	44 / 88.00 m <sup>2</sup>	52 / 109.20 m <sup>2</sup>	60 / 100.80 m <sup>2</sup>
<b>Guarantee</b>	20 years for private use according to Windmüller warranty conditions - www.wineo.de		









Classification		Product composition	
 <b>Utilization class 23</b> EN ISO 10874	Domestic area with intensive usage	1	<b>Top element</b> Surface texture, surface seal, wear layer and decor film
 <b>Utilization class 31</b> EN ISO 10874	Commercial sector with low or occasional usage		
Wear layer binder content EN ISO 10582	Typ I	2	<b>Base layer</b>
 <b>R10</b> Anti slip category EN 16165	R 10	3	<b>Core board</b> with integrated soundPROTECT underlay mat
 Resistance to staining EN 438	Group 1 + 2: grade 4 Group 3: grade 3	4	<b>Profile connection</b> LocTec® locking with profile seal 
 Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6		bevelled edge – 4-sides
 Residual indentation EN ISO 24343-1	≤ 0.2 mm		 TÜV PROFICERT 70 710 4061-9 www.proficert.com tested for emissions, harmful substances PREMIUM
 Thermal resistance EN 12667	≤ 0.058 (m <sup>2</sup> K)/W		
 Impact sound reduction EN ISO 16251-1	~ 14 dB		
REACH	free from SVHC substances ≥ 0.1 %		
Disposal	<u>Private:</u> Possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203		



**Windmüller GmbH**  
Nord-West-Ring 21  
D-32832 Augustdorf

DOP: 0301010  
EN 14041:2004 / AC2006  
1658

- 18 -

≤ 2 kV    ≥ 0.15 W/(mK)

www.wineo.de

**ÉMISSIONS DANS L'AIR INTÉRIEUR\***



A+ A B C

Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)



**factory made**

coated

**Relevant information:**

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.