


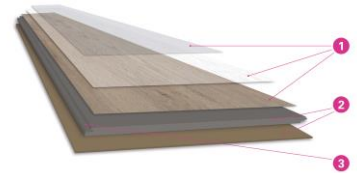
# TECHNICAL CHARACTERISTICS











## wineo 400 Rigid to click – 2023

Heterogeneous resilient-flooring for glueless installation - Covering type according to DIN EN 16511

# wineo

	wood L	wood XL	stone L
<b>Format</b>	1220 x 180 mm	1522 x 225 mm	610 x 305 mm
<b>Product thickness</b>	5.5 mm	5.5 mm	5.5 mm
<b>Planks, tiles / m<sup>2</sup> per box</b>	10 / 2.20 m <sup>2</sup>	6 / 2.05 m <sup>2</sup>	10 / 1.86 m <sup>2</sup>
<b>Boxes / m<sup>2</sup> per pallet</b>	48 / 105.60 m <sup>2</sup>	52 / 106.60 m <sup>2</sup>	60 / 111.60 m <sup>2</sup>
<b>Guarantee</b>	15 years for private use according to Windmüller warranty conditions - <a href="http://www.wineo.de">www.wineo.de</a>		



Classification		Product composition
 <b>Utilization class 23</b> EN ISO 10874	Domestic area with intensive usage	<b>1 Top element</b> Surface texture, surface seal, wear layer and decor film
 <b>Utilization class 31</b> EN ISO 10874	Commercial sector with low or occasional usage	
Wear layer binder content EN ISO 10582	Typ I	<b>2 SPC core board</b> with integrated noise REDUCT underlay mat
 <b>R10</b> Anti slip category EN 16165	R 10	<b>3 Profile connection</b> LocTec locking 
 Resistance to staining EN 438	Group 1 + 2: grade 4 Group 3: grade 3	wood L / stone L bevelled edge 4-sides wood XL V-joint 4-sides lacquered
 Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6	
 Residual indentation EN ISO 24343-1	≤ 0.2 mm	
 Thermal resistance EN 12667	0.035 (m <sup>2</sup> K)/W	
 Impact sound reduction EN ISO 16251-1	~ 19 dB	
 Dimensional stability EN ISO 23999	~ 0.1 %	
REACH	free from SVHC substances ≥ 0.1 %	
Disposal	<u>Private:</u> Possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203	

**CE** - 23 -

Windmüller GmbH  
Nord-West-Ring 21  
D-32832 Augustdorf


DOP: 0301013  
EN 14041:2004 / AC2006  
1658

≥ 0,10 W/(mK)

[www.wineo.de](http://www.wineo.de)

**ÉMISSIONS DANS L'AIR INTÉRIEUR\***

 **A+**

A+ A B C

Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)



### Relevant information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.